
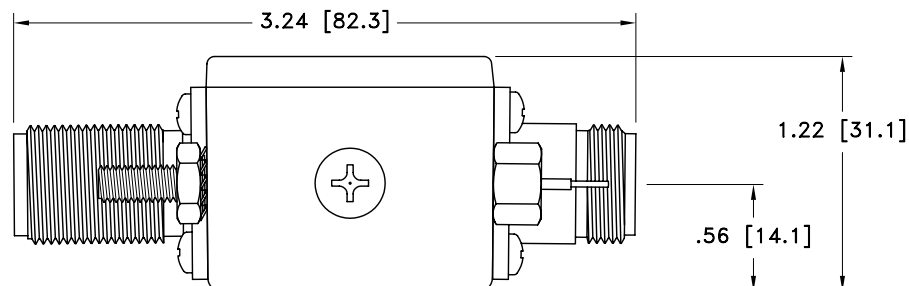
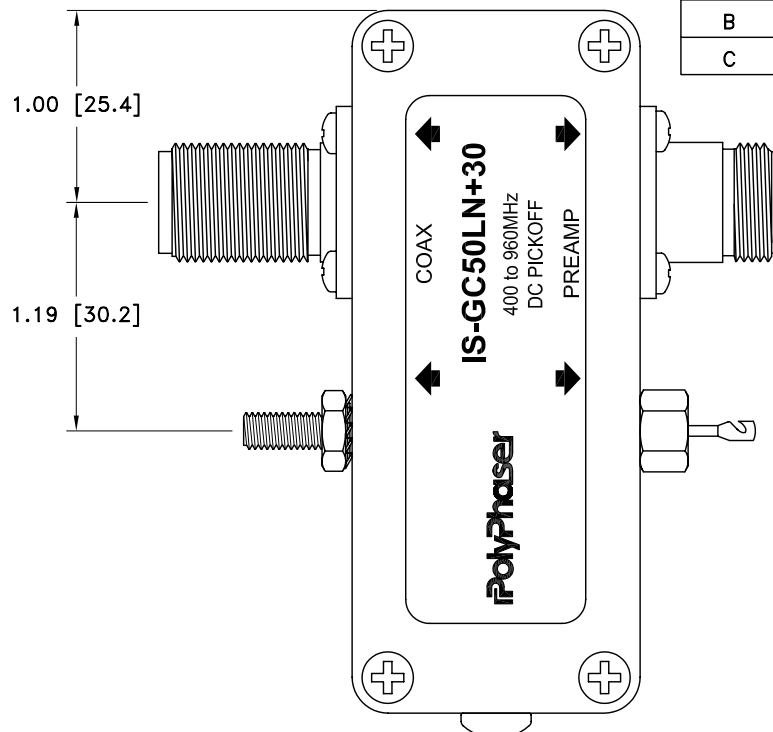


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	04/30/98 _{JC}	TK	--	RM
B	02/19/01 _{IB}	KCB	PH	RM
C	02/26/03 _{IB}	KCB	SD	LJ

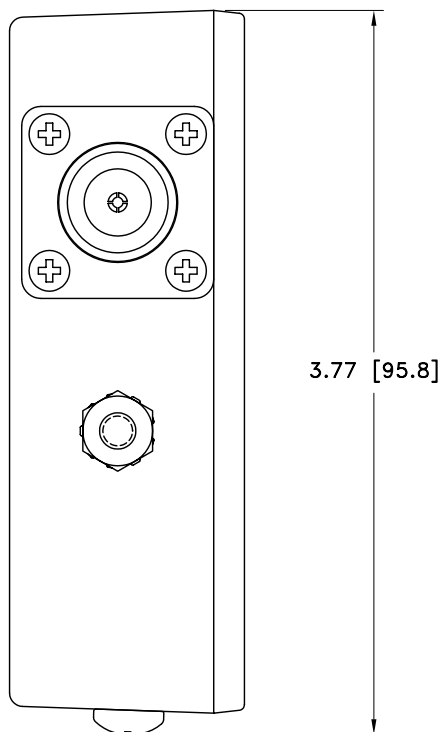

MAXIMUM CHARACTERISTICS

SURGE:
 18kA IEC 1000-4-5 8/20μs WAVEFORM 110 JOULES
 TURN ON:
 +36Vdc ±10%
 TURN ON TIME:
 4ns FOR 2kV/ns
 FREQUENCY RANGE
 400MHz TO 960MHz
 VSWR:
 ≤1.2:1 OVER FREQUENCY RANGE
 INSERTION LOSS:
 ≤0.3dB OVER FREQUENCY RANGE
 USER CURRENT:
 2.5Adc CONTINUOUS
 TEMPERATURE:
 -40° TO +85°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER K. MUNRO	DATE 02/19/96	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION		
MECH ENGINEER - - - -	DATE - - - -			
ELEC ENGINEER T. KULBIEDA	DATE 06/10/96	IS-GC50LN+30 CUSTOMER PRINT		
MARKETING - - - -	DATE - - - -			
QUALITY DEPT - - - -	DATE - - - -	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1
				SHEET 1 OF 1