
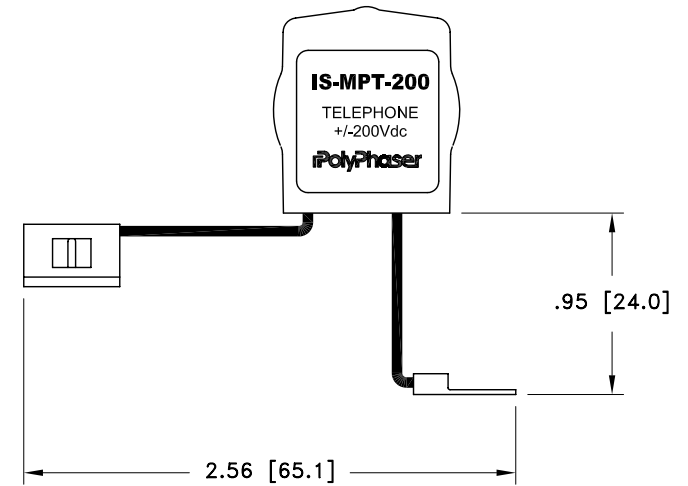
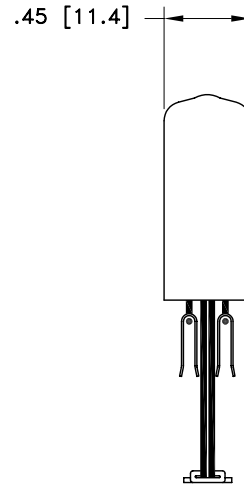


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	12/19/96	LC	--	RM
B	02/17/98	LC	--	BM
C	01/17/01 ^{IB}	KCB	PH	RM
D	01/07/03 ^{SH}	LC	PH	LJ

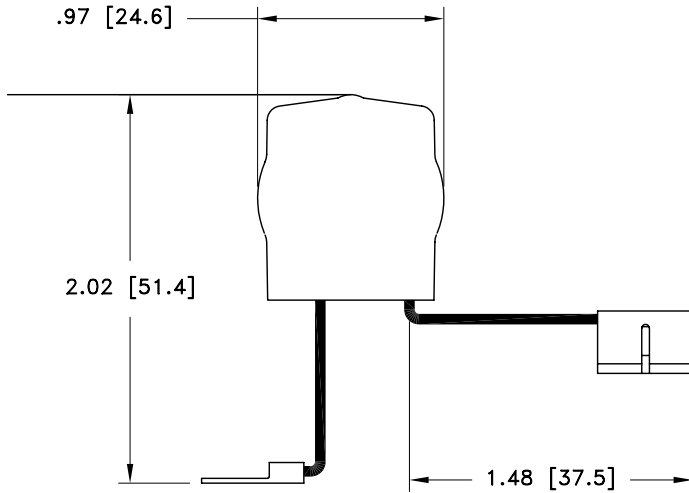


MAXIMUM CHARACTERISTICS

SURGE:
 13ka IEC 1000-4-5 8/20μs WAVEFORM 100 JOULES
OPERATING VOLTAGE:
 +/-200Vdc
TURN-ON TIME:
 2.5ns FOR 2kV/ns
CAPACITANCE L TO G:
 1.6nF
TEMPERATURE:
 -25°C TO +25°C STORAGE/OPERATING

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER D. SCHARMANN	DATE 09/24/91	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 IS-MPT-200 CUSTOMER PRINT			
MECH ENGINEER ---	DATE ---				
ELEC ENGINEER J. JONES	DATE 09/24/91				
MARKETING ---	DATE ---				
QUALITY DEPT N. JOHN	DATE 09/24/91	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1