
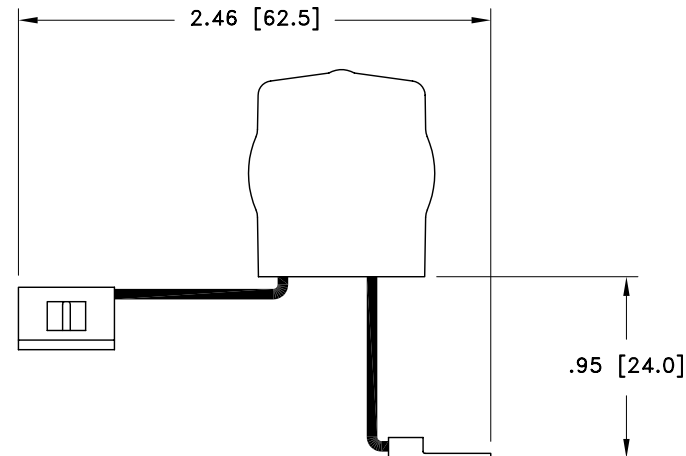
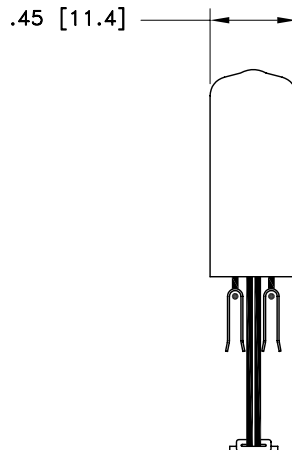


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	07/10/98	TK	--	BM
B	01/17/01 <sup>IB</sup>	KCB	PH	RM
C	05/23/02 <sup>IB</sup>	JJ	PH	RM

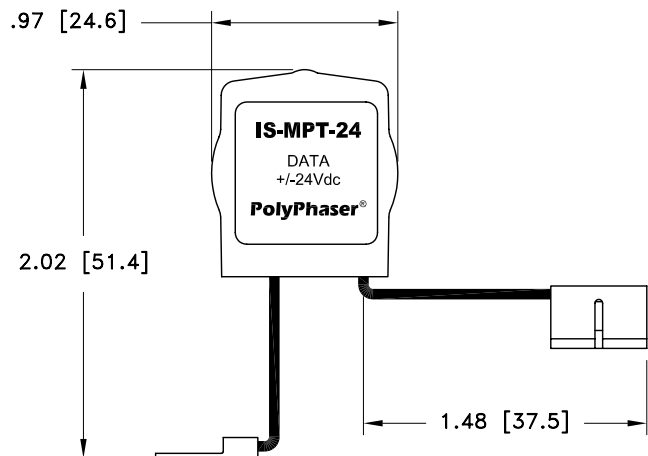

MAXIMUM CHARACTERISTICS
SURGE: 4kA IEC 1000-4-5 8/20μs WAVEFORM 60J
OPERATING VOLTAGE: +/-24Vdc
TURN-ON TIME: ≤2.5ns FOR 2kV/ns
CAPACITANCE L TO G: 27nF
TEMPERATURE: -25°C TO +25°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 05/06/96	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 IS-MPT-24 CUSTOMER PRINT			
MECH ENGINEER O. AKDAG	DATE 05/06/96				
ELEC ENGINEER T. KULBIEDA	DATE 05/06/96				
MARKETING - - - -	DATE - - - -				
QUALITY DEPT R. MATHEUS	DATE 05/06/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1