
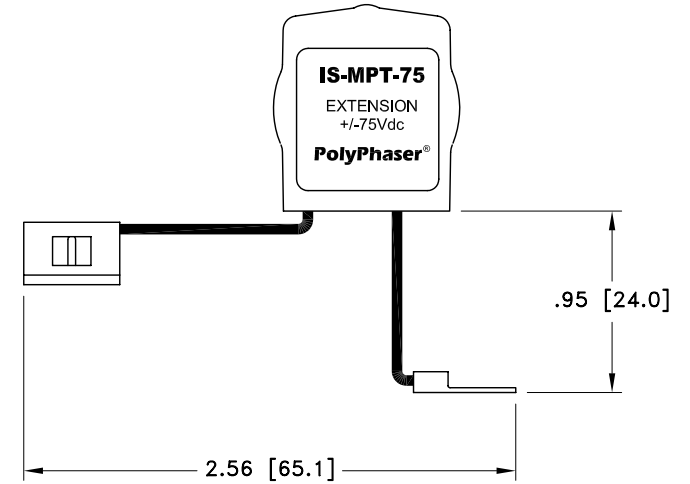
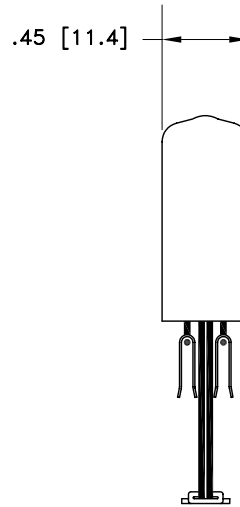


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.

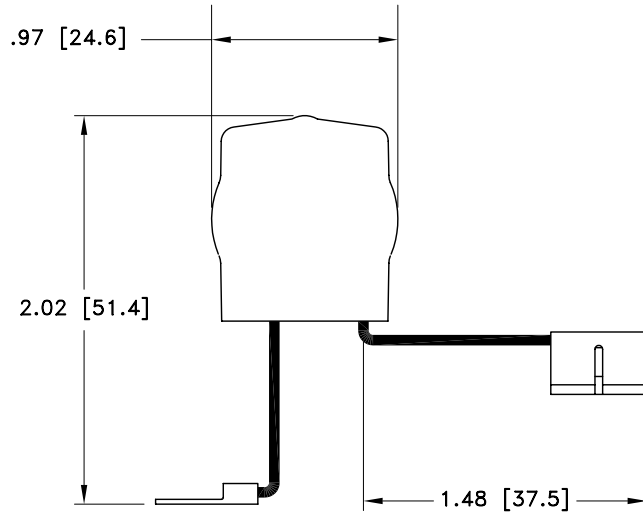

MAXIMUM CHARACTERISTICS

SURGE:
4kA IEC 1000-4-5 8/20μs WAVEFORM 72 JOULES

OPERATING VOLTAGE:
+/-75Vdc

TURN-ON TIME:
2.5ns FOR 2kV/ns

CAPACITANCE L TO G:
5nF

TEMPERATURE:
-25°C TO +25°C STORAGE/OPERATING

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER I. BENNETT	DATE 01/22/01	<p align="center">PolyPhaser®</p> <p align="center">P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476</p> <p align="center">IS-MPT-75 CUSTOMER PRINT</p>		
MECH ENGINEER R. DUNNING	DATE 04/10/01			
ELEC ENGINEER K. BARTEL	DATE 03/27/01			
MARKETING P. HEEREN	DATE 04/09/01			
QUALITY DEPT R. MATHEUS	DATE 04/10/01			
CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1	