
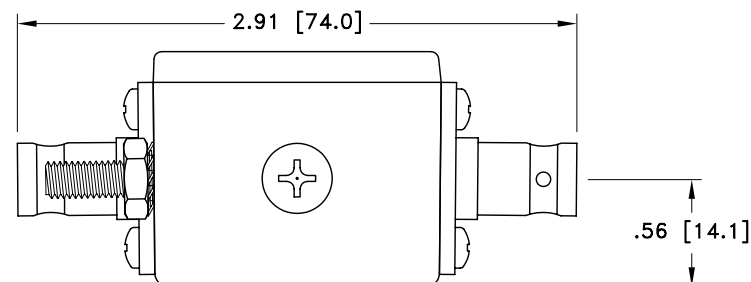
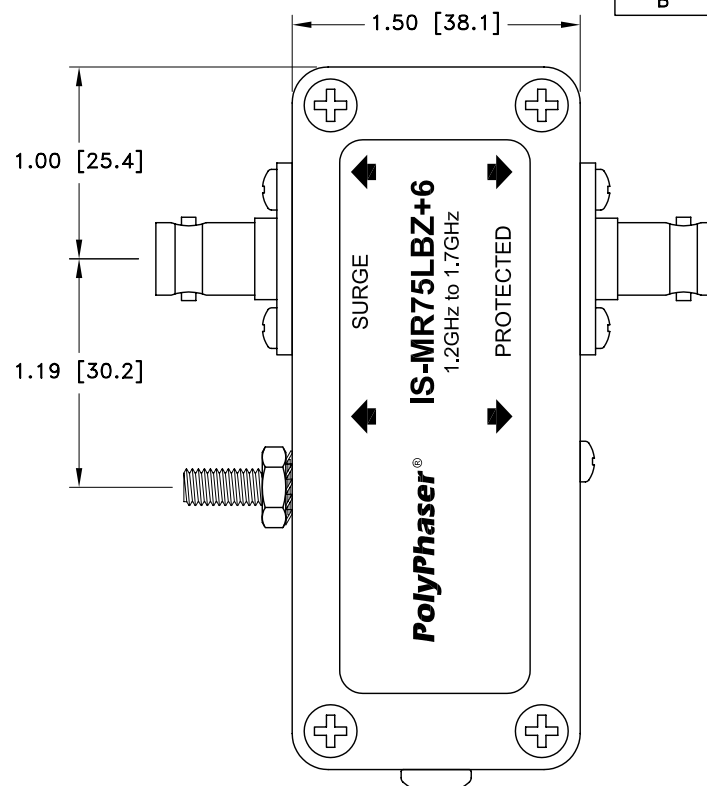


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	05/27/98 _{JC}	KCB	— — —	RM
B	01/14/02 _{SH}	KCB	PH	RM

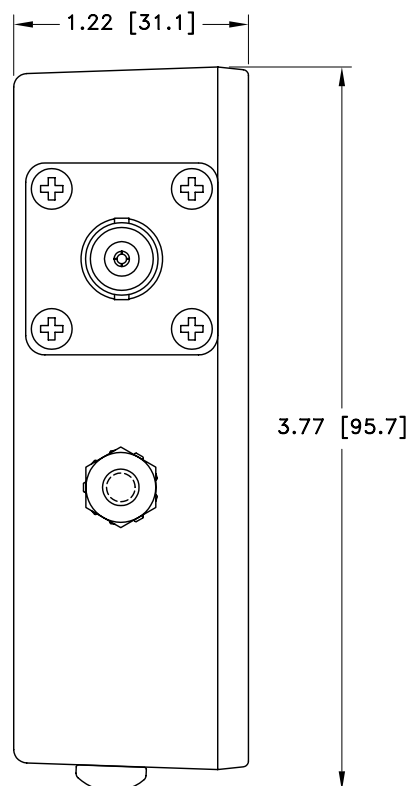

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

MAXIMUM CHARACTERISTICS

FREQUENCY RANGE:
1.2GHz TO 1.7GHz
VSWR:
≤1.1:1 OVER FREQUENCY RANGE
INSERTION LOSS:
≤0.25dB OVER FREQUENCY RANGE
TURN ON VOLTAGE:
+6.5Vdc @ 10mA
OPERATING TEMPERATURE:
-40°C TO +60°C
STORAGE TEMPERATURE:
-40°C TO +60°C

DRAFTER J. CALLISTER	DATE 05/22/97	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION		
MECH ENGINEER — — — —	DATE — — — —			
ELEC ENGINEER T. KULBIEDA	DATE 06/10/97	IS-MR75LBZ+6 CUSTOMER PRINT		
MARKETING — — — —	DATE — — — —			
QUALITY DEPT R. MATHEUS	DATE 06/10/97	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1
		SHEET 1 OF 1		