


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	07/18/96	TK	--	RM
B	01/29/01 <sub>JC</sub>	KCB	PH	RM

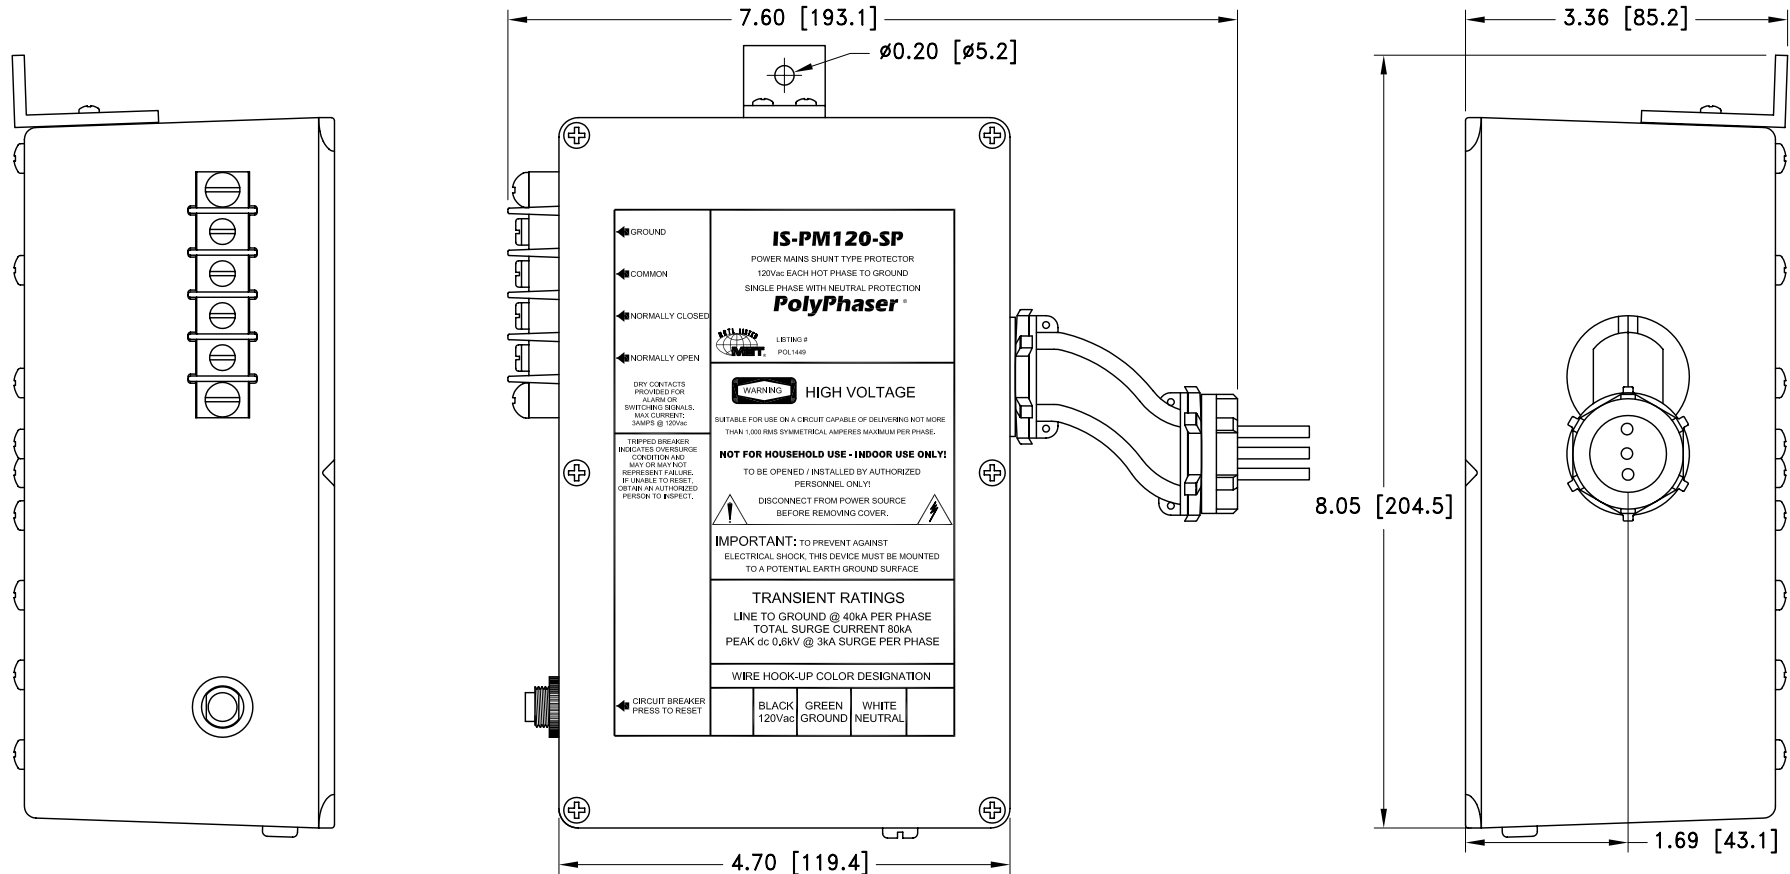

MAXIMUM CHARACTERISTICS
APPLICATION: FLANGE MOUNT
SURGE: 40kA IEC 1000-4-5 8/20 $\mu$ s WAVEFORM
TURN-ON (PHASE TO GROUND): 205Vdc / 145Vac
TURN-ON TIME: $\leq 25$ ns FOR FULL LEAD LENGTH 2kV/ns
TOTAL SURGE CURRENT: 80kA
PEAK dc VOLTAGE w/ 3kA SURGE: 400V
TEMPERATURE: +5°C TO +40°C STORAGE/OPERATING

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_  
ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. DUNNING	DATE 05/09/94	<b>PolyPhaser®</b> P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION <b>IS-PM120-SP</b> CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER J. JONES	DATE 05/31/94				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 05/31/94	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1