
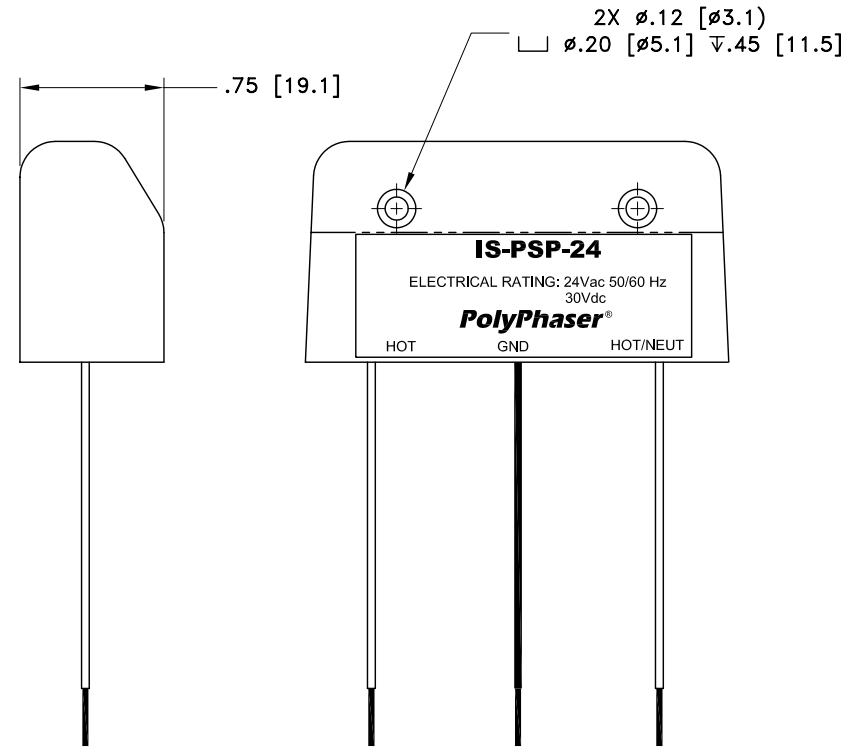


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	03/05/01	KCB	PH	RM

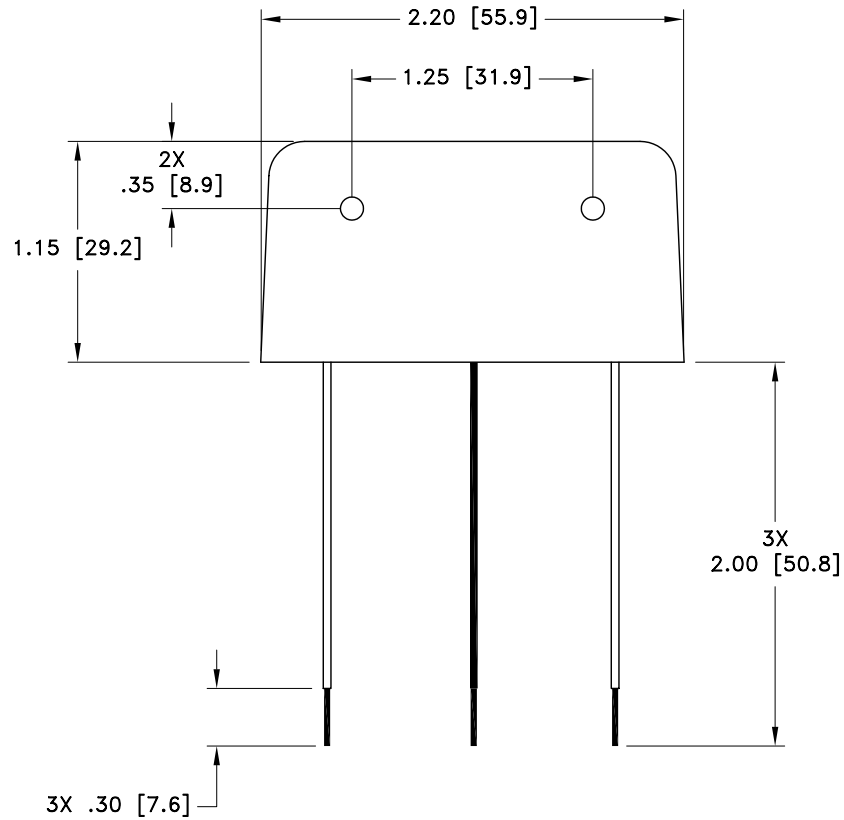

MAXIMUM CHARACTERISTICS
SURGE: 35kA IEC 1000-4-5 8/20 μ s WAVEFORM
TURN-ON: \pm 39Vdc \pm 10% LINE TO LINE 40 TO 90Vdc LINE TO GROUND
OPERATING: 24Vac 50/60Hz, 30Vdc
TURN-ON TIME: <2ns L TO L, 10ns L TO G FOR 2kV/ns

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER J. CALLISTER	DATE 06/24/98	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION IS-PSP-24 CUSTOMER PRINT			
MECH ENGINEER O. AKDAG	DATE 08/04/98				
ELEC ENGINEER K. BARTEL	DATE 08/04/98				
MARKETING - - - -	DATE - - - -				
QUALITY DEPT R. MATHEUS	DATE 08/05/98	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1