
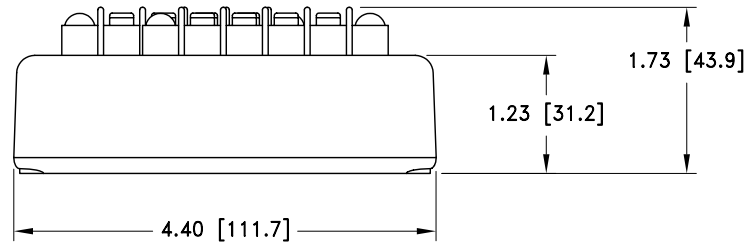



ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
B	01/11/01 <sup>SH</sup>	KCB	PH	RM
C	07/01/03 <sup>SH</sup>	LC	SD	LJ

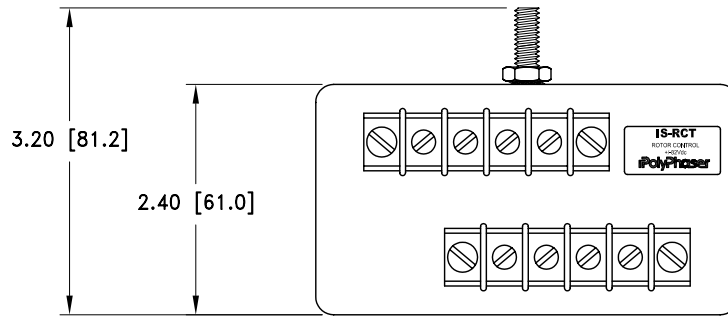

MAXIMUM CHARACTERISTICS

SURGE:  
6500A (EACH LINE) IEC 61000-4-5 8/20 $\mu$ s  
WAVEFORM 72 JOULES


TURN ON:  
82Vdc  $\pm$ 10%

TURN ON TIME:  
<4ns

TEMPERATURE:  
-40°C TO +85°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER K. MUNRO	DATE 08/09/96	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION <b>IS-RCT</b> <b>CUSTOMER PRINT</b>			
MECH ENGINEER - - - - -	DATE - - - - -				
ELEC ENGINEER T. KULBIEDA	DATE 08/09/96				
MARKETING - - - - -	DATE - - - - -				
QUALITY DEPT R. MATHEUS	DATE 08/09/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1