

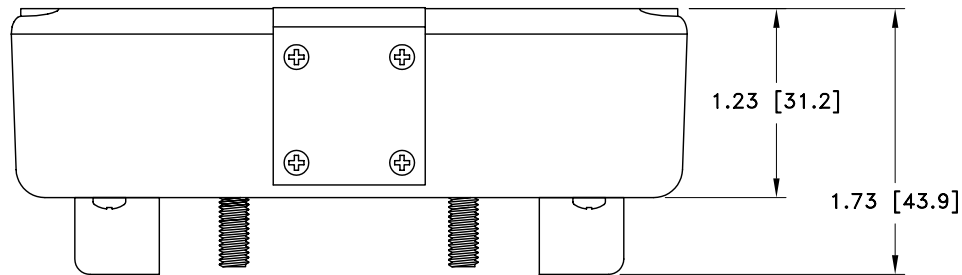


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
C	12/17/99 ^{SH}	M.M	P.H	R.M
D	01/16/01 ^{IB}	LC	PH	RM
E	01/03/03	LC	PH	LJ

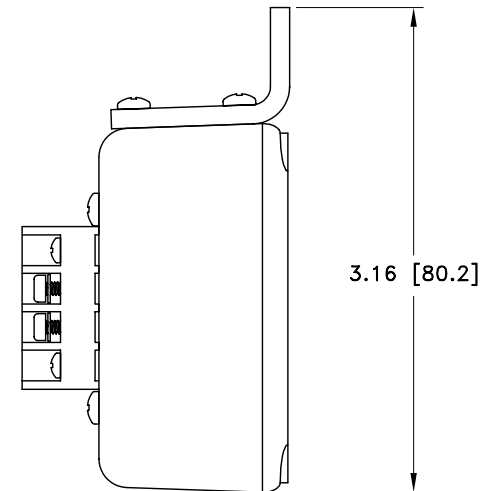


MAXIMUM CHARACTERISTICS	
SURGE:	40kA 1000-4-5 8/20ns WAVEFORM
TURN-ON:	±200Vdc
TURN-ON TIME:	2.5ns FOR 2kV/ns
RESISTANCE:	20Ω ± 1%
CAPACITANCE:	2.4nF
SURGE ENERGY:	550J
LET THROUGH:	300Vp
BAND WIDTH:	250KHz

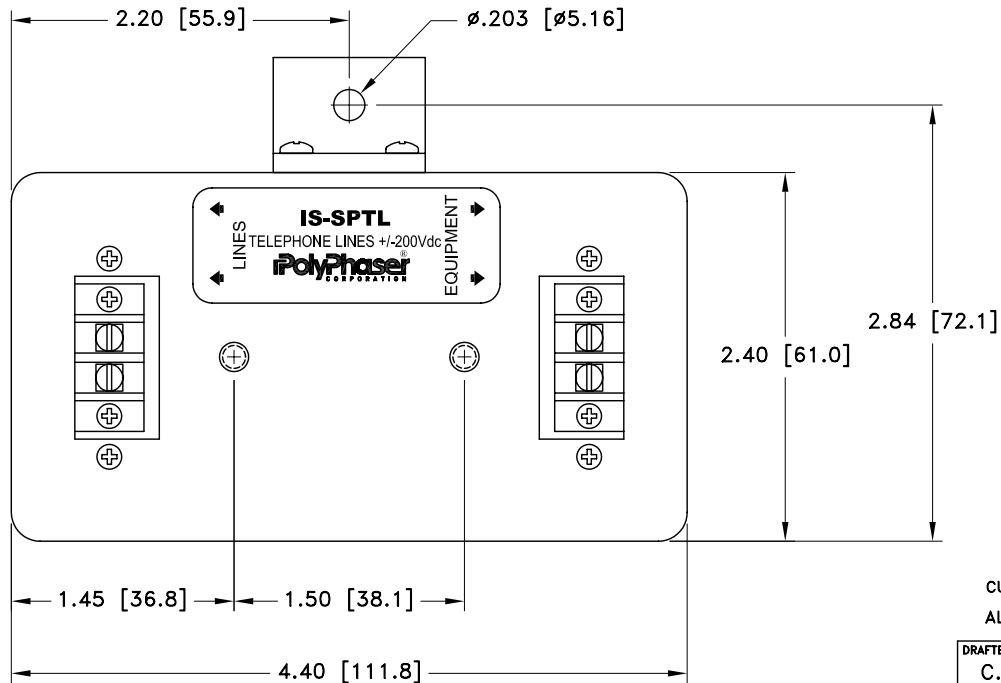

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 02/28/96	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IS-SPTL CUSTOMER PRINT			
MECH ENGINEER O. AKDAG	DATE 02/28/96				
ELEC ENGINEER K. BARTEL	DATE 02/28/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 02/28/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.25	SHEET 1 OF 1