
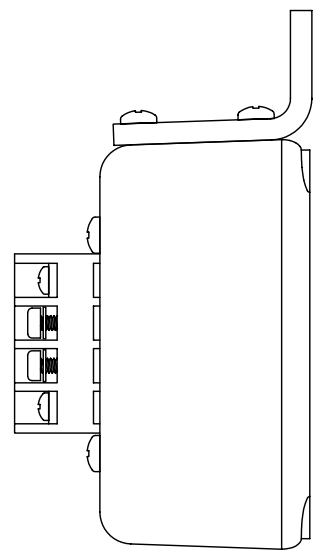
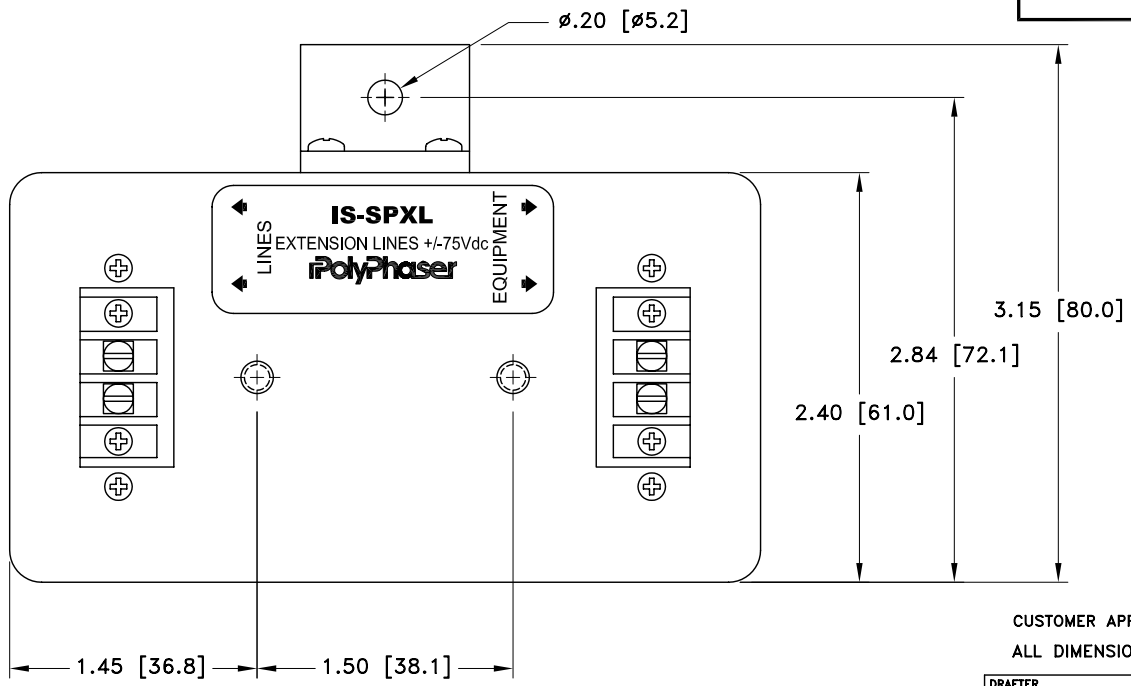


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.


REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
C	01/16/01 _{IB}	KCB	PH	RM
D	11/19/02 _{IB}	LC	SD	LJ

MAXIMUM CHARACTERISTICS

SURGE:
 40kA ANSI C62.1 8/20 WAVEFORM
 TURN-ON @ 10mA:
 ±75Vdc
 RESISTANCE:
 20Ω @ 1%
 CAPACITANCE:
 11nF
 SURGE ENERGY:
 550J
 LET-THROUGH:
 100Vp
 -3dB (600Ω) BANDWIDTH:
 30kHz
 TEMPERATURE:
 -40°C TO 85°C STORAGE/OPERATING +50°C

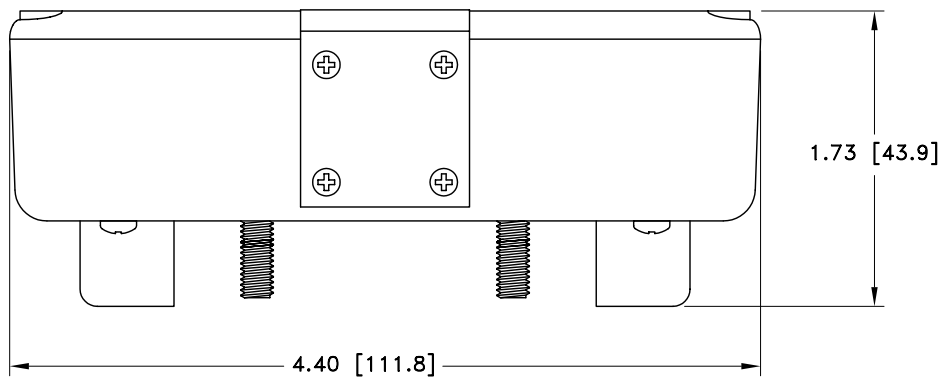

CUSTOMER APPROVAL: _____ DATE: _____
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER S. HALL	DATE 07/22/98	 P.O. BOX 9000 MINDEN, NY 89423 TEL: 775-782-2511 FAX: 775-782-4476 IS-SPXL CUSTOMER PRINT			
MECH ENGINEER J. VITELLO	DATE 10/07/98				
ELEC ENGINEER A. GULBAG	DATE 10/07/98				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 10/07/98	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.125	SHEET 1 OF 1