
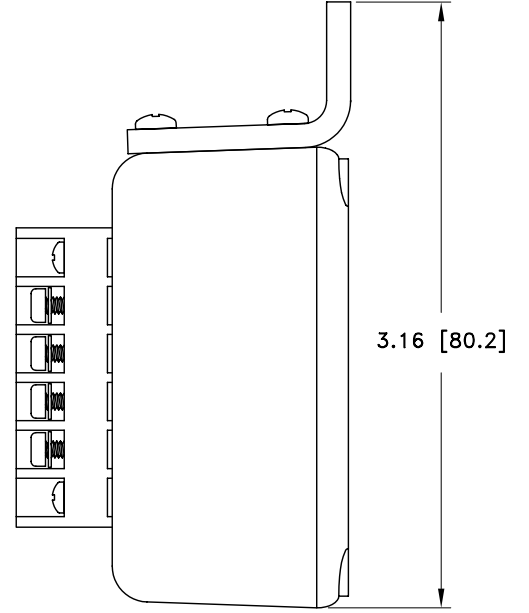
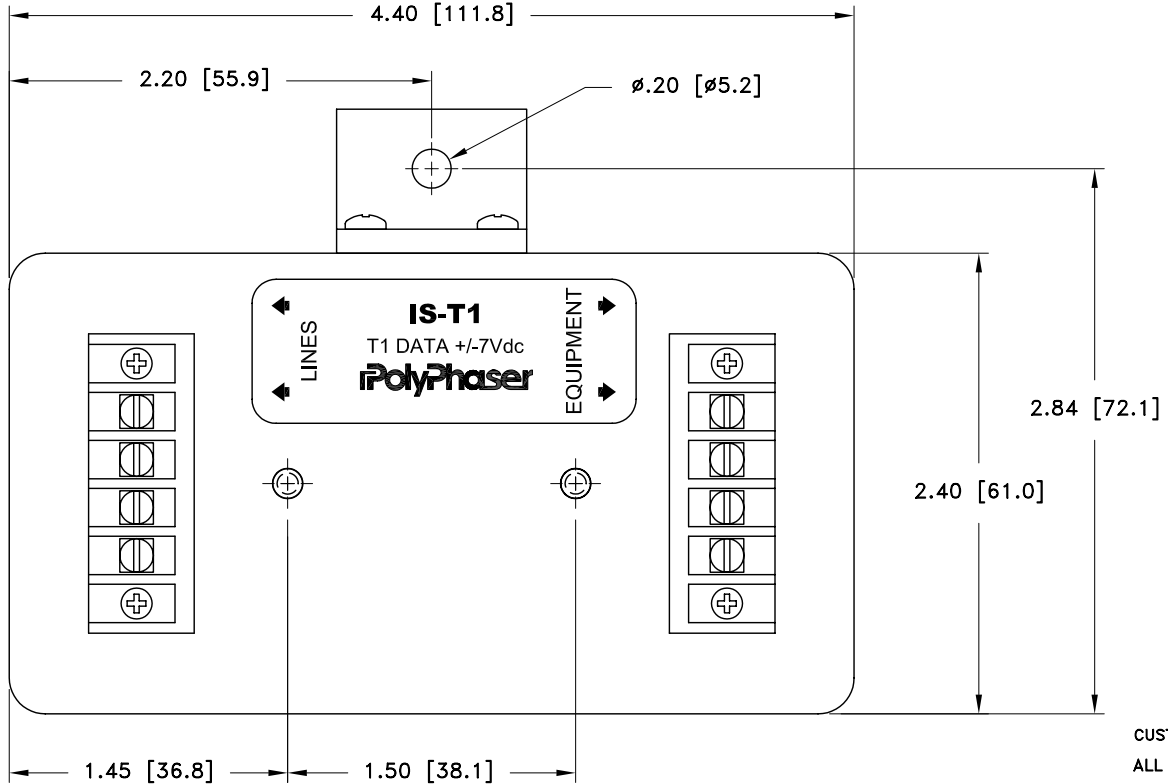


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
H	01/31/03 _{SH}	LC	PH	LJ

MAXIMUM CHARACTERISTICS
SURGE: 36kA ANSI C62.1 8/20 WAVEFORM
TURN-ON: +7Vdc ±20%
RESISTANCE: 1Ω
CAPACITANCE: 30pF
SURGE ENERGY: 425J
BAND WIDTH: 120MHz
LET THROUGH: 17Vp

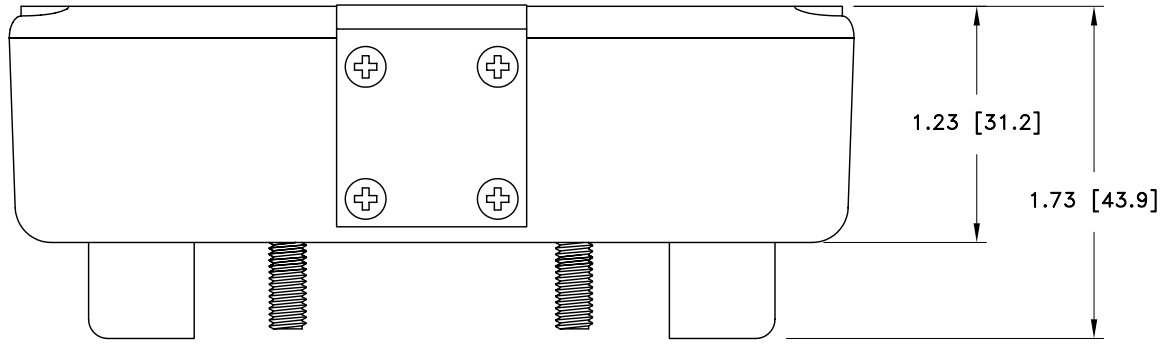

CUSTOMER APPROVAL: _____ DATE: _____
 ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER M. JOHNSON	DATE 07/12/94
MECH ENGINEER -----	DATE -----
ELEC ENGINEER T. KULBIEDA	DATE 07/12/94
MARKETING -----	DATE -----
QUALITY DEPT R. MATHEUS	DATE 07/12/94

PolyPhaser
 P.O. BOX 9000 MINDEN, NY 89423 TEL: 775-782-2511 FAX: 775-782-4476
 DWG NO/PART NO/DESCRIPTION

IS-T1
 CUSTOMER PRINT

CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1
--------------------	------------------	--------------	-----------------