

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/07/03 <sub>RS</sub>	LC	SD	LJ

**MAXIMUM CHARACTERISTICS DATA**


TURN-ON(@10mA):  
 +9Vdc ±10%  
 UL 497B STRIKE VOLTAGE BREAKDOWN  
 (100 Vdc /SEC RISE):  
 +8.4 TO +9.6 Vdc  
 RESISTANCE:  
 1Ω ±20%  
 DATA RATE:  
 UP TO 100Mbps  
 MAX HOLDING CURRENT:  
 400mA @ +20°C  
 620mA @ -40°C  
 290mA @ +50°C

**MAXIMUM CHARACTERISTICS DC**

TURN-ON (@10mA):  
 ±56Vdc ±10%  
 UL 497B STRIKE VOLTAGE BREAKDOWN  
 (100 Vdc /SEC RISE):  
 ±54.8 TO ±58.0 Vdc  
 RESISTANCE:  
 .05Ω ±20%  
 CURRENT:  
 2A MAX  
 MAX HOLDING CURRENT:  
 3.00A @ +20°C  
 4.13A @ -40°C  
 2.43A @ +50°C


**GENERAL CHARACTERISTICS**

SURGE:  
 BELLCORE 1089 10/1000μs 100A  
 TEMPERATURE:  
 -40°C TO +65°C STORAGE/OPERATING +50°C  
 WIRE RANGE:  
 16 TO 28 AWG.  
 APPLICATION:  
 INDOOR PANEL MOUNT

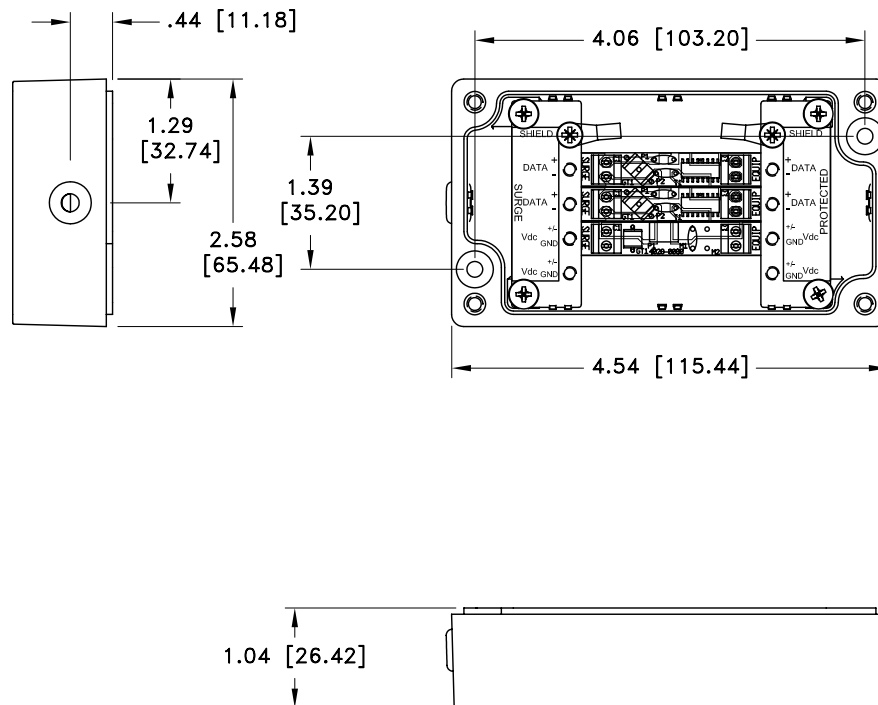

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. SWART	DATE 09/03/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-2H1DC48 CUSTOMER PRINT	
MECH ENGINEER J. JONES	DATE 09/05/03		
ELEC ENGINEER L. CHANG	DATE 09/05/03		
MARKETING S. DOTTER	DATE 09/05/03		
QUALITY DEPT L. JACQUES	DATE 09/05/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1

NOTES:

1. TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.