

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/07/03 _{RS}	LC	SD	LJ

MAXIMUM CHARACTERISTICS DATA



TURN-ON(@10mA):
 ±12Vdc ±10%
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
 +10.0 TO +12.4 Vdc
 RESISTANCE:
 1Ω ±20%
 DATA RATE:
 UP TO 25Mbps
 MAX HOLDING CURRENT:
 400mA @ +20°C
 620mA @ -40°C
 290mA @ +50°C

MAXIMUM CHARACTERISTICS DC

TURN-ON (@10mA):
 ±56Vdc ±10%
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
 ±54.8 TO ±58.0 Vdc
 RESISTANCE:
 .05Ω ±20%
 CURRENT:
 2A MAX
 MAX HOLDING CURRENT:
 3.00A @ +20°C
 4.13A @ -40°C
 2.43A @ +50°C

GENERAL CHARACTERISTICS

SURGE:
 BELLCORE 1089 10/1000μs 100A
 TEMPERATURE:
 -40°C TO +65°C STORAGE/OPERATING +50°C
 WIRE RANGE:
 16 TO 28 AWG.
 APPLICATION:
 INDOOR PANEL MOUNT

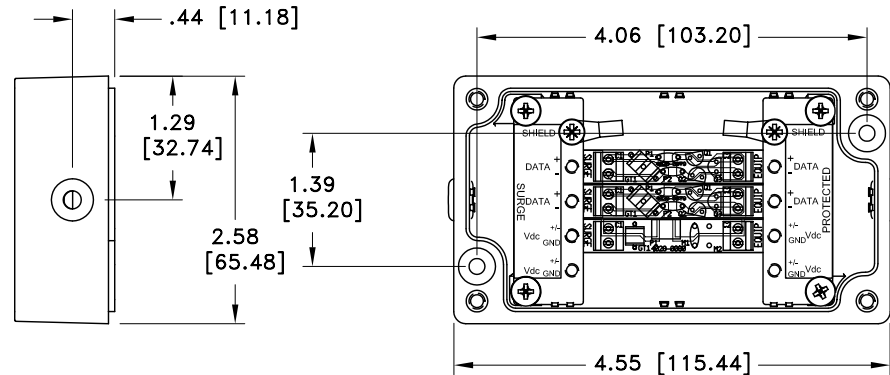


NOTES:

- TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. SWART	DATE 08/18/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-2L1DC48 CUSTOMER PRINT	
MECH ENGINEER R. DUNNING	DATE 08/21/03		
ELEC ENGINEER L. CHANG	DATE 08/19/03		
MARKETING S. DOTTER	DATE 08/19/03		
QUALITY DEPT L. JACQUES	DATE 08/19/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1