


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	10/06/03 <sub>RS</sub>	LC	SD	LJ

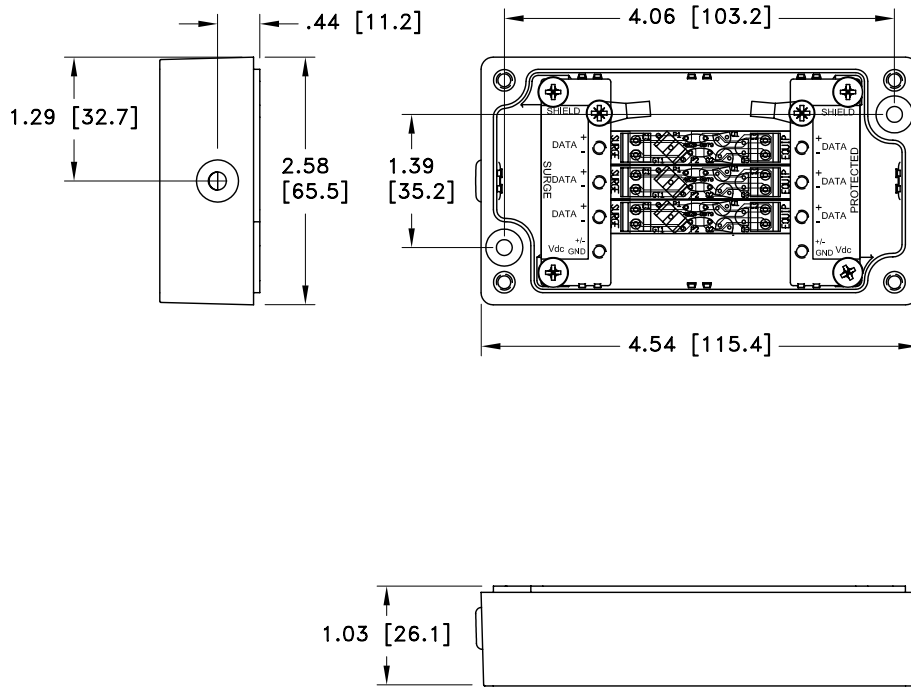

MAXIMUM CHARACTERISTICS DATA
TURN-ON (@10mA): ±12Vdc ±10%
UL 497B STRIKE VOLTAGE BREAKDOWN (100 Vdc /SEC RISE): +10.0 TO +12.4 Vdc
RESISTANCE: 1Ω ±10%
DATA RATE: UP TO 25Mbps
MAX HOLDING CURRENT: 400mA @ +20°C 620mA @ -40°C 290mA @ +50°C

GENERAL CHARACTERISTICS
SURGE: BELLCORE 1089 10/1000μs 100A
TEMPERATURE: -40°C TO +65°C STORAGE/OPERATING +50°C
WIRE RANGE: 16 TO 28 AWG.
APPLICATION: INDOOR PANEL MOUNT

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

NOTES:

- TORQUE 4X M4-20MM SCREWS TO 11 lbf-in MINIMUM.

DRAFTER R. SWART	DATE 07/18/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION <b>IX-3L</b> CUSTOMER PRINT	
MECH ENGINEER R. DUNNING	DATE 07/24/03		
ELEC ENGINEER L. CHANG	DATE 07/23/03		
MARKETING S. DOTTER	DATE 07/24/03		
QUALITY DEPT J. BERNARD	DATE 07/24/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1