

ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	10/08/03 _{RS}	LC	SD	LJ

MAXIMUM CHARACTERISTICS DATA

TURN-ON(@10mA):
 ±12Vdc ±10%
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
 +10.0 TO +12.4 Vdc
 RESISTANCE:
 1Ω ±20%
 DATA RATE:
 UP TO 25Mbps
 MAX HOLDING CURRENT:
 400mA @ +20°C
 620mA @ -40°C
 290mA @ +50°C

MAXIMUM CHARACTERISTICS DC


TURN-ON (@10mA):
 ±33Vdc ±10%
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
 ±30.8 TO ±33.2 Vdc
 RESISTANCE:
 .05Ω ±20%
 CURRENT:
 2A MAX
 MAX HOLDING CURRENT:
 3.00A @ +20°C
 4.13A @ -40°C
 2.43A @ +50°C

GENERAL CHARACTERISTICS

SURGE:
 BELLCORE 1089 10/1000μs 100A
 TEMPERATURE:
 -40°C TO +65°C STORAGE/OPERATING +50°C
 WIRE RANGE:
 16 TO 28 AWG.
 CORD DIAMETER:
 0.114 TO 0.250 INCH
 APPLICATION:
 WEATHERIZED AFTER PROPER TORQUE OF LID AND
 THRU FITTINGS, PANEL MOUNT.
 ENVIRONMENTAL:
 MEETS BELLCORE #TA-NWT-000487 PROCEDURE 4.11,
 WIND DRIVEN RAIN (70MPH) RAIN INTRUSION TEST.


NOTES:

1. TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.
2. ENSURE THAT ALL THRU FITTINGS ARE TORQUED FOR ENVIRONMENTAL SPECIFICATIONS.

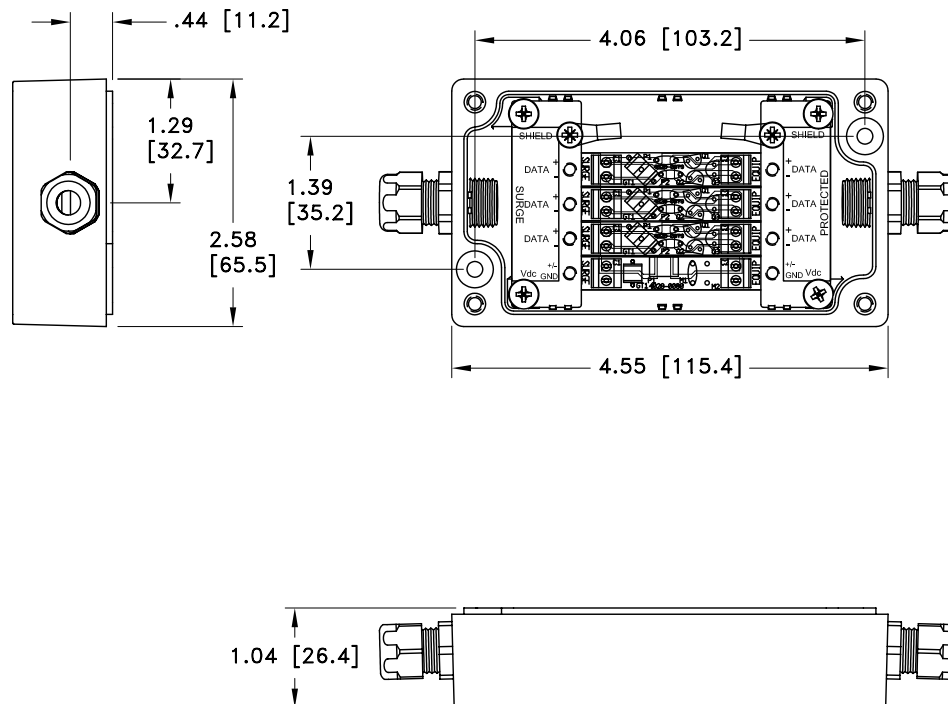

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. SWART	DATE 09/09/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-3L1DC24/W CUSTOMER PRINT	
MECH ENGINEER R. DUNNING	DATE 09/10/03		
ELEC ENGINEER L. CHANG	DATE 09/09/03		
MARKETING S. DOTTER	DATE 09/09/03		
QUALITY DEPT L. JACQUES	DATE 09/10/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1