


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.


REVISIONS

| REV LTR | DATE | ENG | MKTG | Q.A. |
|---------|------|-----|------|------|
| | | | | |

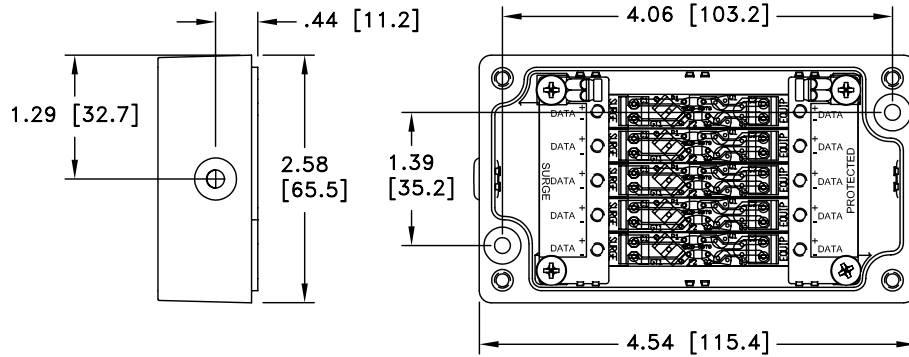

| MAXIMUM CHARACTERISTICS DATA | |
|---|---|
| TURN-ON (@10mA): | ±12Vdc TYPICAL |
| UL 497B STRIKE VOLTAGE BREAKDOWN (100Vdc/SEC RISE): | +10.0 TO +12.4Vdc |
| RESISTANCE: | 1Ω ±20% |
| DATA RATE: | UP TO 25Mbps |
| MAX HOLDING CURRENT: | 400mA @ +20°C 620mA @ -40°C 290mA @ +50°C |


| GENERAL CHARACTERISTICS | |
|-------------------------|--|
| SURGE: | BELLCORE 1089 10/1000μs 100A |
| APPLICATION: | INDOOR PANEL MOUNT |
| TEMPERATURE: | -40°C TO +65°C STORAGE/OPERATING +50°C |
| WIRE RANGE: | 16 TO 28 AWG |



CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

- NOTES:
- TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.

| | | | |
|-----------------------------|------------------|---|-----------------|
| DRAFTER R. SWART | DATE 01/20/04 |  P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-5L CUSTOMER PRINT | |
| MECH ENGINEER R. DUNNING | DATE 01/21/04 | | |
| ELEC ENGINEER L. CHANG | DATE 01/21/04 | | |
| MARKETING S. DOTTER | DATE 01/21/04 | | |
| QUALITY DEPT L. JACQUES | DATE 01/21/04 | | |
| CAGE CODE 61114 | FILE NAME -C1 | SCALE 1/1 | SHEET 1 OF 1 |