


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
---------	------	-----	------	------

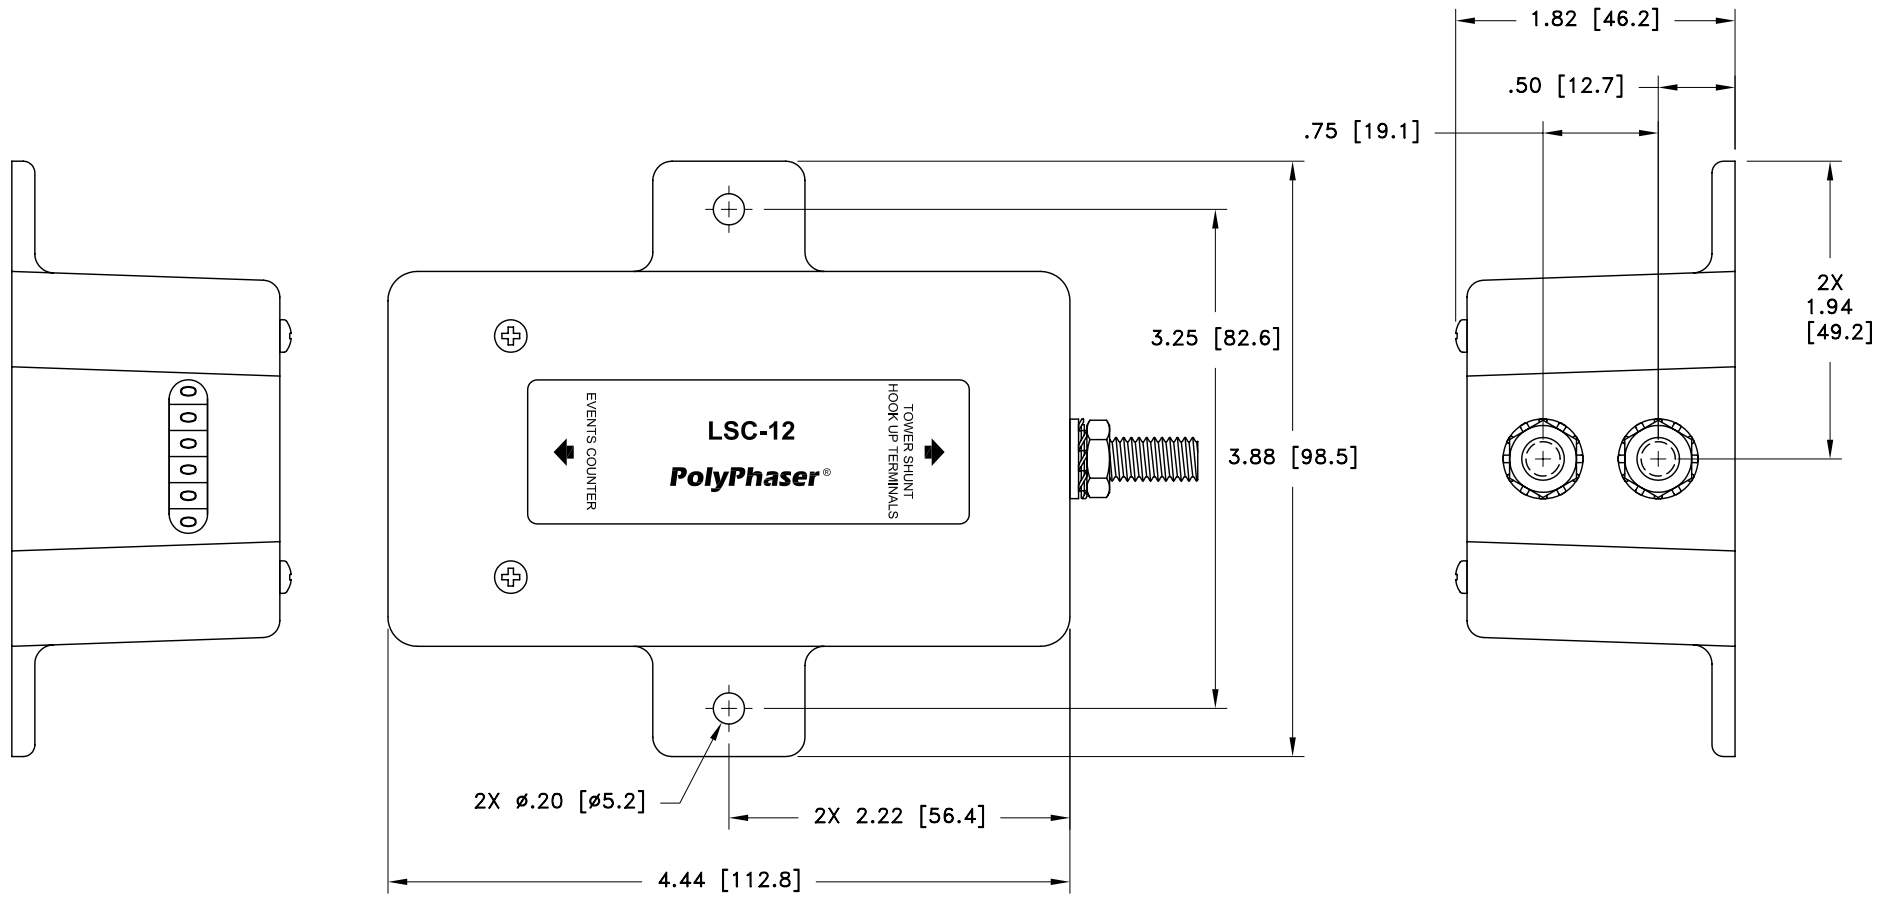

MAXIMUM CHARACTERISTICS

APPLICATION:
 COUNTS DAMAGING SURGES
 REMOTE INSTALLATION, 9Vdc BATTERY
 MAX SWITCHING VOLTAGE:
 110Vdc, 125Vac
 CONTACT RATING:
 1A, 30Vdc MAXIMUM
 10µA 10mVdc MINIMUM

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER I. BENNETT	DATE 06/01/01	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 LSC-12 CUSTOMER PRINT			
MECH ENGINEER R. DUNNING	DATE 08/21/01				
ELEC ENGINEER K. BARTEL	DATE 08/07/01				
MARKETING P. HEEREN	DATE 08/14/01				
QUALITY DEPT R. MATHEUS	DATE 08/14/01	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.25	SHEET 1 OF 1