


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	02/17/00 ^{IB}	KCB	PH	JB
B	05/31/01 ^{IB}	KCB	PH	LJ

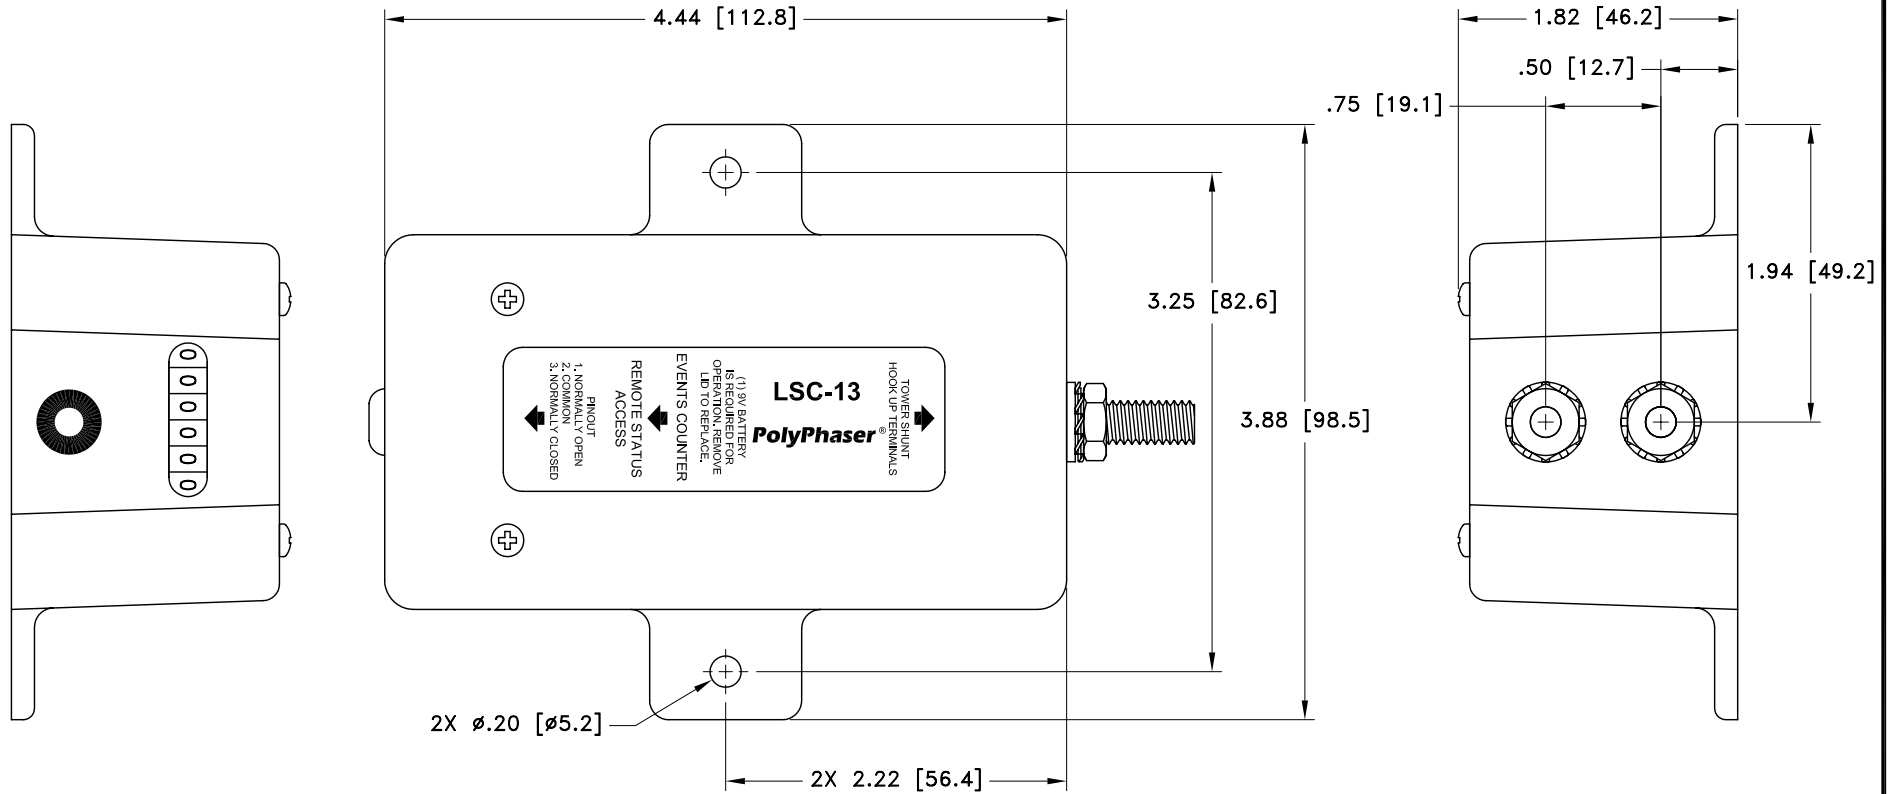

MAXIMUM CHARACTERISTICS

APPLICATION:
 COUNTS DAMAGING SURGES
 REMOTE INSTALLATION, 9Vdc BATTERY
 MAX SWITCHING VOLTAGE:
 110Vdc, 125Vac
 CONTACT RATING:
 1A, 30Vdc MAXIMUM
 10µA 10mVdc MINIMUM

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER C. GASPARINI	DATE 10/30/96	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 LSC-13 CUSTOMER PRINT			
MECH ENGINEER -----	DATE -----				
ELEC ENGINEER L. CHANG	DATE 12/03/96				
MARKETING -----	DATE -----				
QUALITY DEPT R. MATHEUS	DATE 12/06/96	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1.25	SHEET 1 OF 1