


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV LTR	DATE	ENG	MKTG	Q.A.
A	03/25/04 <sub>RS</sub>	JJ	SD	LJ

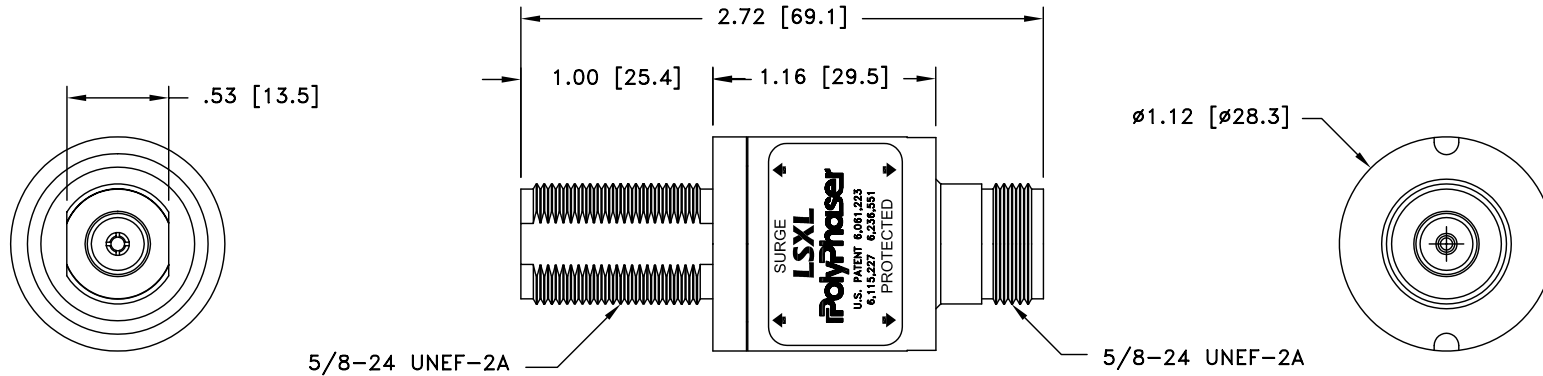

**MAXIMUM CHARACTERISTICS**

**APPLICATION:**

BULKHEAD MOUNT  
WEATHERPROOF WHEN INSTALLED

**SURGE:**

18kA IEC 61000-4-5 8/20μs WAVEFORM

**FREQUENCY RANGE:**

1.8GHz TO 3.8GHz  
4.2GHz TO 6.0GHz

**VSWR:**

≤1.2:1 TYPICAL  
≤1.3:1 MAX

**INSERTION LOSS:**

≤0.2dB

**CONTINUOUS POWER:**

10W

**LET THROUGH VOLTAGE:**

≤±3 VOLTS FOR 3kA @ 8/20μs WAVEFORM

**THROUGHPUT ENERGY:**

≤0.5μJ FOR 3kA @8/20μs WAVEFORM

**TEMPERATURE:**

-40°C TO +85°C STORAGE/OPERATING

**VIBRATION:**


1G AT 5Hz TO 100Hz

**ENVIRONMENTAL:**

MEETS IEC 60529 IP65.  
MEETS BELLCORE #TA-NWT-000487  
PROCEDURE 4.11, WIND DRIVEN (120MPH)  
RAIN INTRUSION TEST.

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER R. DUNNING	DATE 06/26/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION LSXL CUSTOMER PRINT	
MECH ENGINEER R. DUNNING	DATE 07/24/03		
ELEC ENGINEER J. JONES	DATE 07/24/03		
MARKETING P. HEERAN	DATE 08/11/03		
QUALITY DEPT R. MATHEUS	DATE 08/11/03		
CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1