
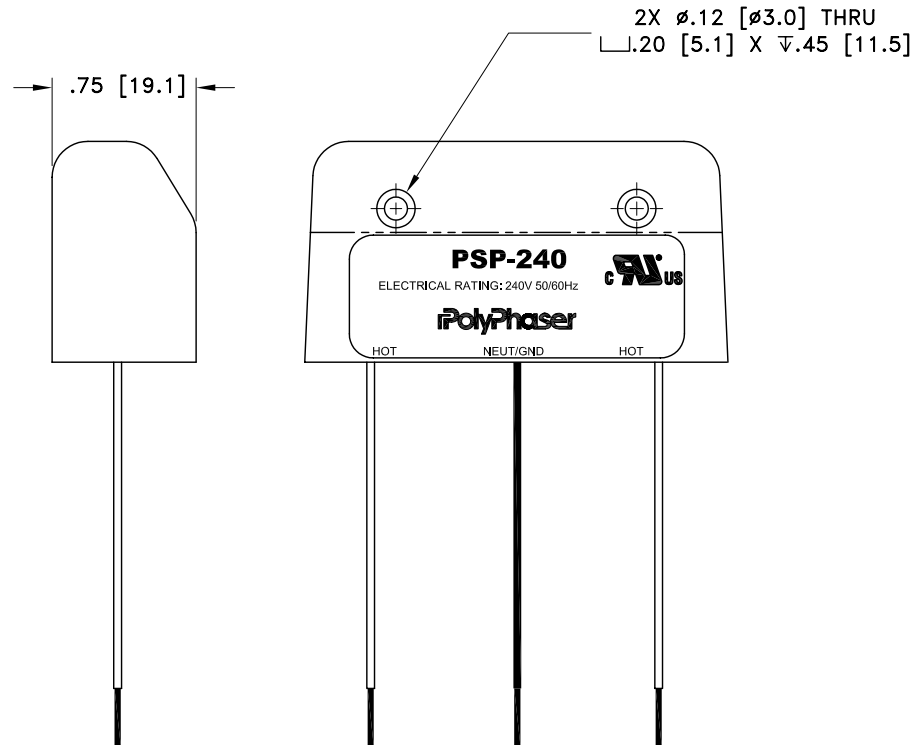


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
A	07/01/03 SH	LC	SD	LJ

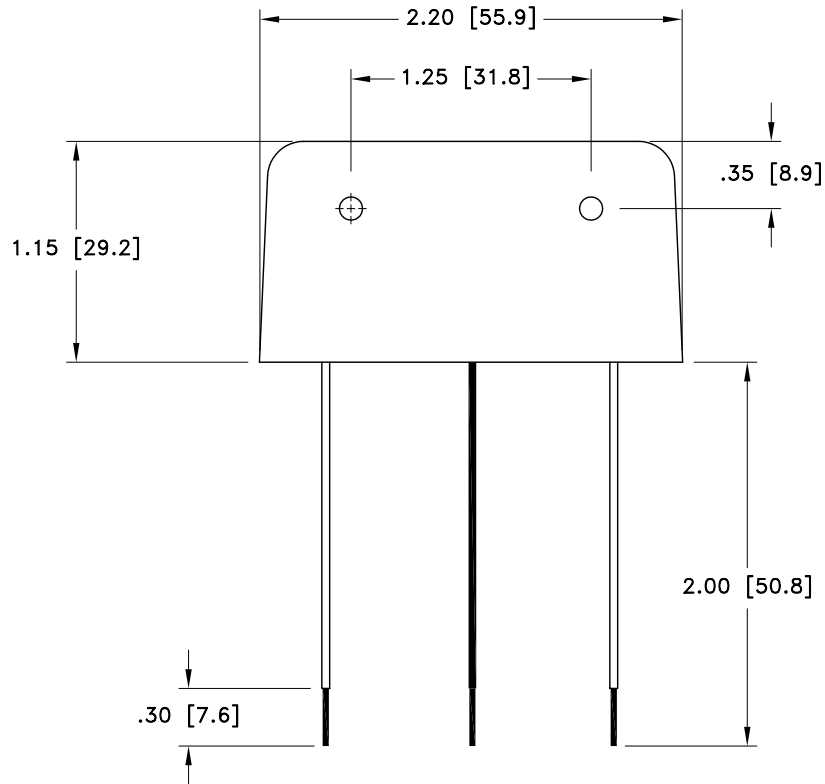

MAXIMUM CHARACTERISTICS

SURGE:

35kA IEC 61000-4-5 8/20 μ s WAVEFORM

TURN-ON:

\pm 430Vdc LINE TO LINE

\pm 360 TO 700Vdc LINE TO GROUND

SUPPRESSION:

400V LINE TO LINE

400V LINE TO GROUND


TURN-ON TIME:

<2ns L TO L, 10ns L TO G FOR 2kV/ns

ALL REVISIONS TO THIS DOCUMENT MUST BE UL APPROVED.

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER I. BENNETT	DATE 02/28/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION PSP-240 CUSTOMER PRINT			
MECH ENGINEER J. JONES	DATE 03/26/03				
ELEC ENGINEER L. CHANG	DATE 03/26/03				
MARKETING S. DOTTER	DATE 03/26/03				
QUALITY DEPT R. MATHEUS	DATE 03/26/03	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1