



HIGH FREQUENCY PERFORMANCE WORLDWIDE

SPINNER designs and builds cutting-edge radio frequency systems, setting performance and longevity standards for others to follow. The company's track record of innovation dates back to 1946, and many of today's mainstream products are rooted in SPINNER inventions.

Industry leaders continue to count on SPINNER's engineering excellence to drive down their costs of service and ownership with premium-quality, off-the-shelf products and custom solutions. Headquartered in Munich, Germany, the global frontrunner in RF components remains the first choice in simple-yet-smart RF solutions.

www.spinner-group.com

SPINNER GmbH

Headquarters

Erzgiessereistr. 33
80335 Munich

GERMANY

Phone: +49 89 12601-0
Fax: +49 89 12601-1292
info@spinner-group.com

ООО SPINNER Elektrotechnik

Kozhevicheskaja str. 1, bld. 1
Office 420
115114 Moscow

RUSSIA

Phone: +7 495 6385 321
Fax: +7 499 2353 358
info-russia@spinner-group.com

SPINNER Nordic AB

Kråketorpsgatan 20
43153 Mölndal

SWEDEN

Phone: +46 31 7061670
Fax: +46 31 7061679
info-nordic@spinner-group.com

SPINNER Austria GmbH

Triester Str. 190
1230 Vienna

AUSTRIA

Phone: +43 1 66277 51
Fax: +43 1 66277 5115
info-austria@spinner-group.com

SPINNER France S.A.R.L.

24 Rue Albert Priolet
78100 St. Germain en Laye

FRANCE

Phone: +33 1 74 13 85 24
info-france@spinner-group.com

SPINNER Telecommunication

Devices (Shanghai) Co., Ltd.
351 Lian Yang Road
Songjiang Industrial Zone
Shanghai 201613

P.R. CHINA

Phone: +86 21 577 45377
Fax: +86 21 577 40962
info-china@spinner-group.com

SPINNER Electrotécnica S.L.

c/ Perú, 4 – Local nº 15
28230 Las Rozas (Madrid)

SPAIN

Phone: +34 91 6305 842
Fax: +34 91 6305 838
info-iberia@spinner-group.com

SPINNER ICT Inc.

2220 Northmont Parkway, 250
Duluth, GA 30096

USA

Phone: +1 770 2636 326
Fax: +1 770 9343 384
info@spinner-group.com

SPINNER UK Ltd.

Suite 8 Phoenix House
Golborne Enterprise Park,
High Street
Golborne, Warrington
WA3 3DP


UNITED KINGDOM

Phone: +44 1942 275222
Fax: +44 1942 275221
info-uk@spinner-group.com

SPINNER

Combined Contactless Data and Power Transmission Modules

for Rotating Real Time Applications

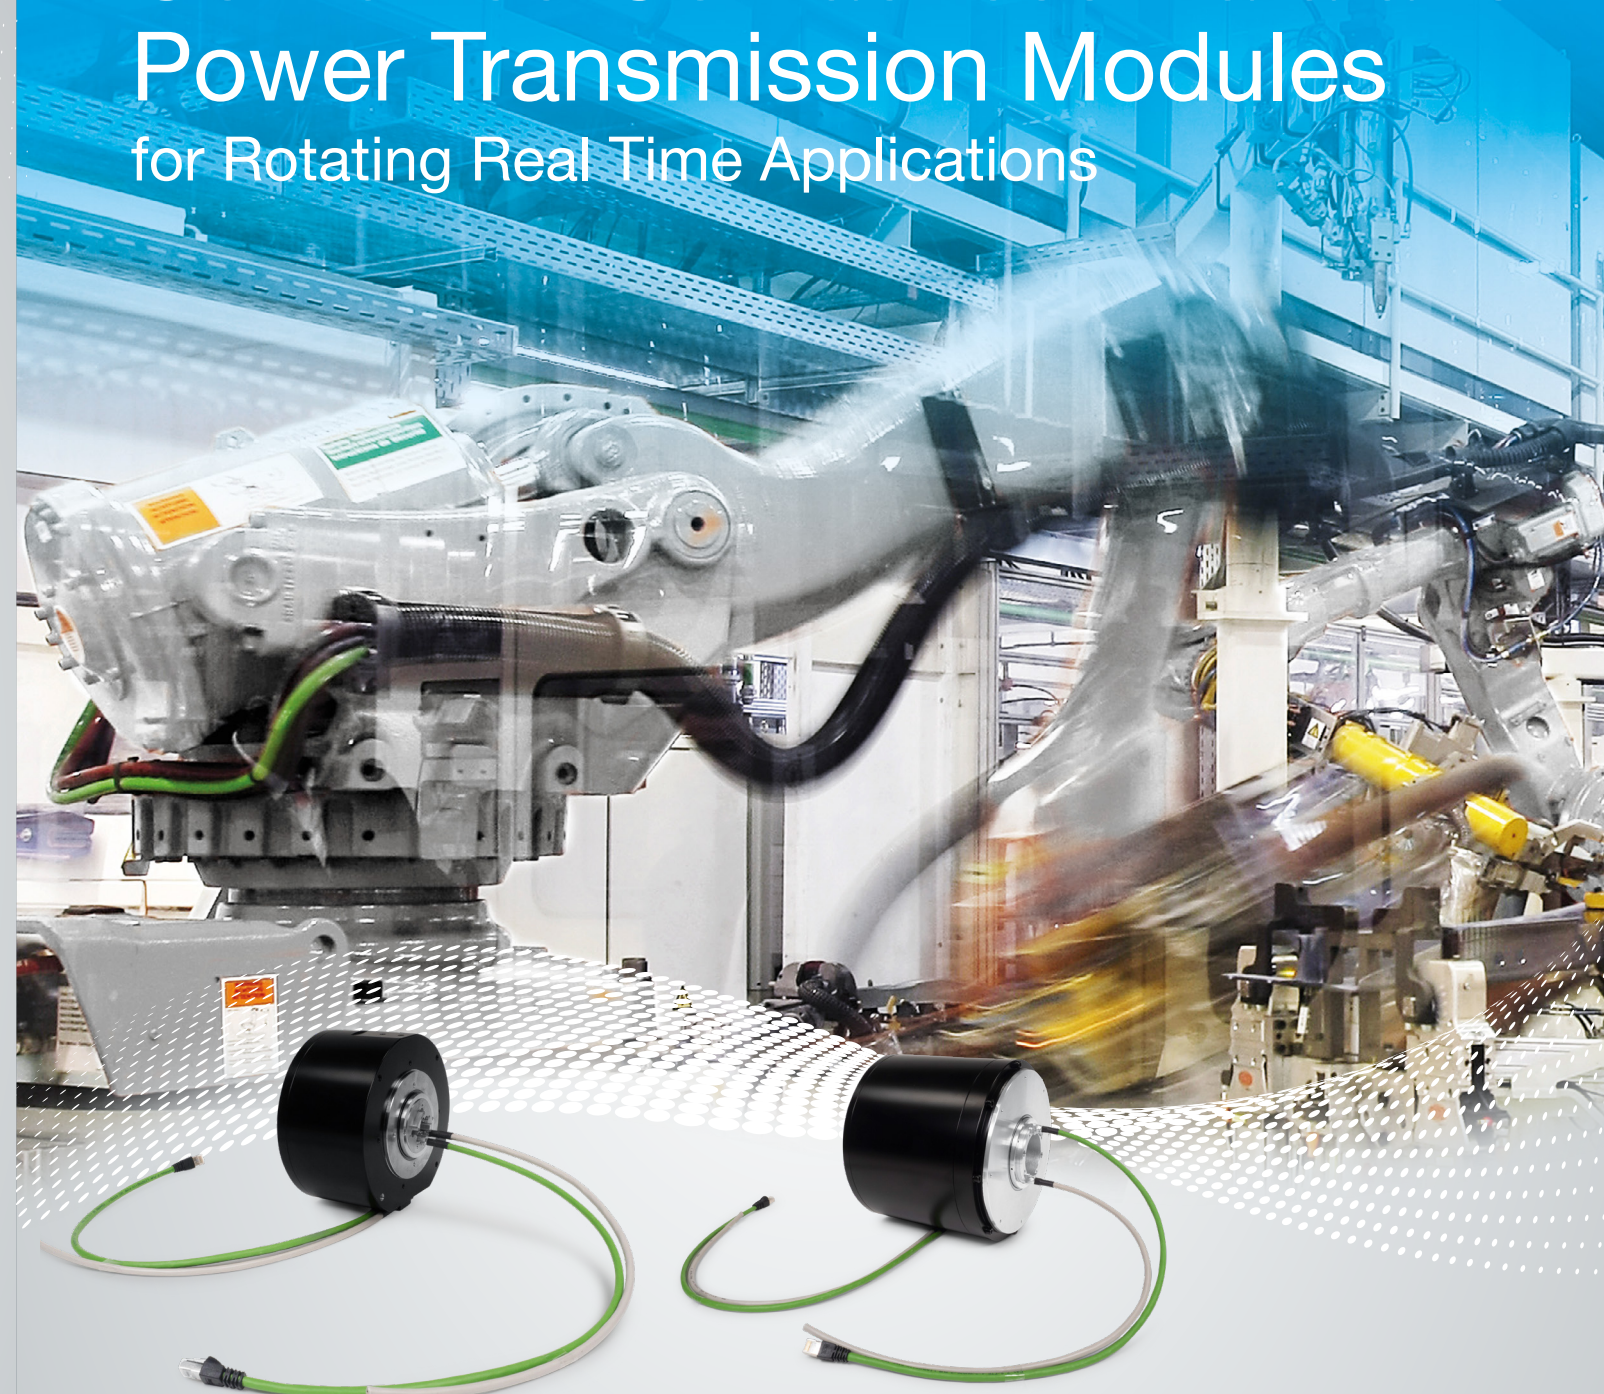

BN 637490 / 637493 and 637491

PROFINET, EtherNet/IP, VARAN, IEEE-1588 v2 (PTP), and more.

ETHERNET 
POWERLINK

HIGH FREQUENCY PERFORMANCE WORLDWIDE
www.spinner-group.com



Combined Contactless Data and Power Transmission Modules

SPINNER uniquely combines contactless data modules for rotary applications. The modules are designed for 24/7 use. No maintenance due to contactless transmission. They are available for the 24V and 48V industrial voltages in 300W and 750W versions with different clear inner diameters.

Available Configurations (Data Transmission):

Type	
4	1 Channel ethernet for real-time applications 100BASE-TX, full duplex*
7	2 Channel ethernet (multiplexed) for real-time applications 100BASE-TX, full duplex*

*semi-duplex on request

100BASE-TX Ethernet-Channel	One or two signal channels provided
OSI layer operation	Layer 1 (physical)
Supported protocols	All real-time Ethernet protocols
Ethernet frame loss ratio according to RFC2544	$\leq 1 \times 10^{-9}$ Measured for 800s with 64-byte frames at 99% channel utilization, corr. to BER $\leq 1 \times 10^{-12}$
Data interface connection	Cat.6A S/FTP 4x2xAWG26/7 (PiMF) on body and hollow core sides

Available models:

Version	BN 637490 / 637493	BN 637491
Nominal output power	300 W	750 W
External power supply	Power supply must be SELV type acc. to IEC60950-1	
Input voltage range	48 V DC $\pm$ 10% / 24 V DC $\pm$ 10%	48 V DC $\pm$ 10%
Output voltage	48 V DC $\pm$ 5% / 24 V DC $\pm$ 5%	48 V DC $\pm$ 5%
	Potential-free with case ground	
Output current, continuous	6.6 A	15.8 A
Efficiency	85% @ full load	90% @ full load
Type of external load	Resistive	
Protection	Output with overcurrent protection and short-circuit-protected	


Standards and directives

Applicable EU Directive	EMC Directive 2014/30/EU
Applied standards	DIN EN 55032 (Class B) Radio disturbance characteristics
	DIN EN 55024 Immunity characteristics

Mechanical Characteristics and Environmental Conditions

Clear inner diameter	BN 637490 / BN 637493 20 mm	BN 637491 50 mm
Max. rotational speed	300 rpm*	
Min. service life	200 x 10 ⁶ revolutions	
Duty cycle	100%	
MTBF	300,000 h	
Case material	aluminum alloy	
IP protection level	IP60	
Operating ambient temperature range (near housing)	BN 637490 / BN 637493 -25°C to +60°C	BN 637491 -30 °C to + 45 °C
Storage ambient temperature range	-40°C to +85°C	

*BN 637490 / 637493: up to 3,000 rpm on request

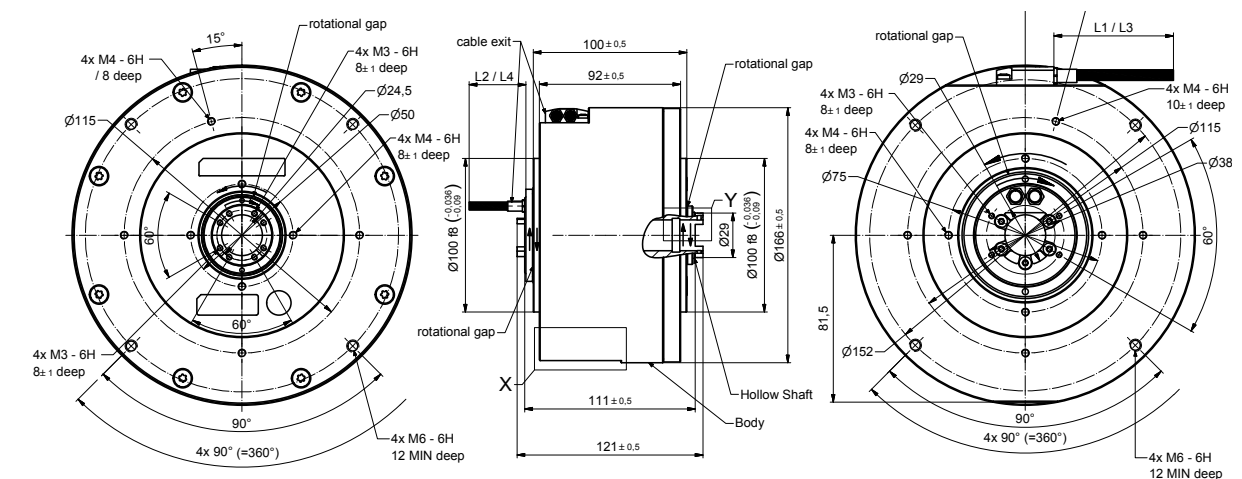Standard Outline BN 637490 (all dimensions in mm)**Standard Outline BN 637491** (all dimensions in mm)