



アンテナ、アンプ、RF 信号などの自動切替えに最適

テレダイン社製ハイパワー同軸スイッチ

型番：CCS - 32N10 - 11 (ダクト入り)

低価格、即納対応

【仕様】

Specifications	DC-1 GHz	1-4 GHz	4-12 GHz*
VSWR (max)	1.25:1	1.40:1	1.70:1
Insertion Loss (min)	0.30 dB	0.40 dB	0.50 dB
Isolation (max)	70.0 dB	60.0 dB	60.0 dB

RF Contacts:	Break before make	
Actuator	Voltage (VDC) 20°C	28
	Current (mA)	250

Switching Time: 20 msec max

Connectors: N Type

Weight: 6 oz. max

Temperature Range: -40°C to +65°C (Operating)


Shock: MIL-STD-202 Method 213, Condition D (500G Non Operating)

Vibration: MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)



Humidity: Moisture Seal Available

Typical Contact Life: 5 Million Cycles

【寸法】 (インチ)

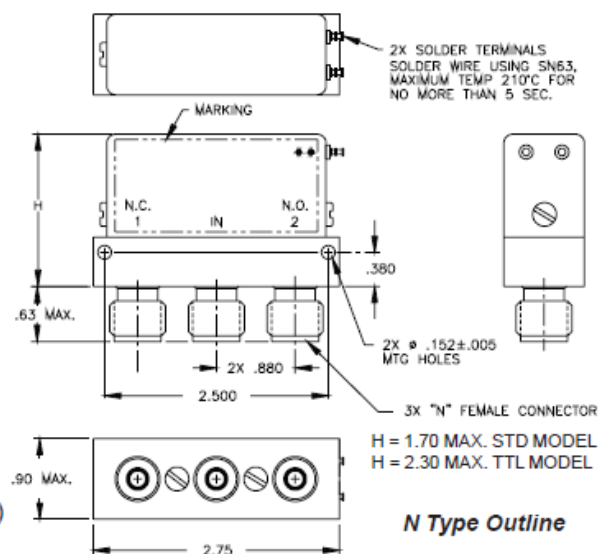

【電力チャート】

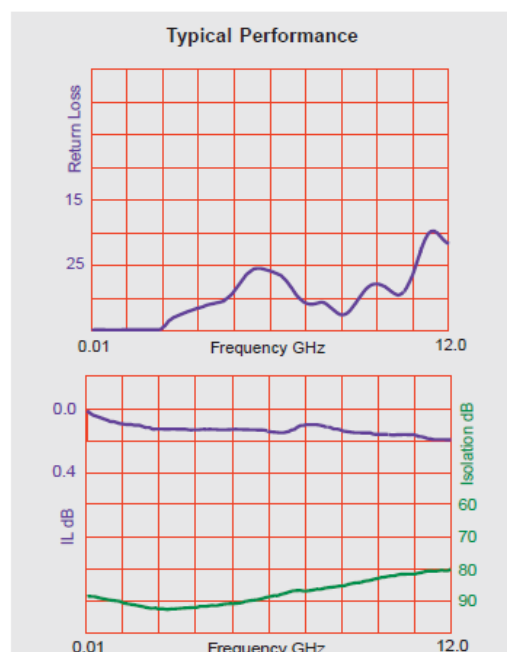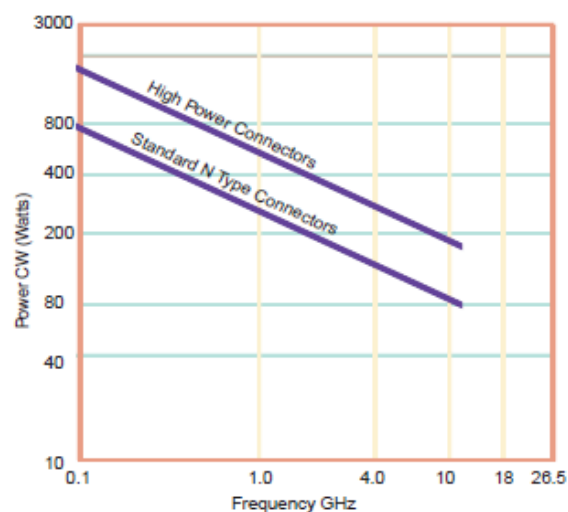

お問合せ先：株式会社 コムクラフト・テレダイン課

〒167-0034 東京都杉並区桃井1-2-4 TEL:03-3395-5553 FAX:03-3395-5666

E-mail : info@comcraft.co.jp URL : <http://www.comcraft.co.jp>