



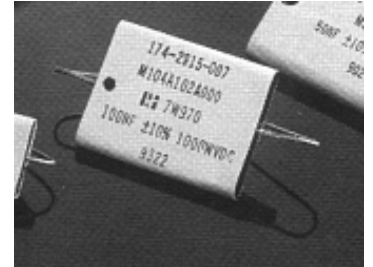

www.reynoldsindustries.com

# Standard **Micapacitors** Data Sheet 5.0 kVDC Rated

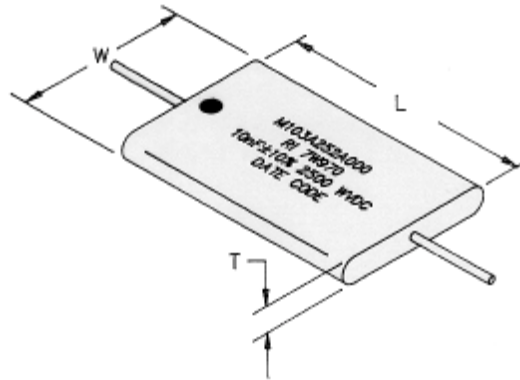

Part Number	Voltage kVDC)	Cap. (nF)	Length	Width	Thickness
M502A502A002	5.0	5	1.44/36.6	0.82/20.8	0.17/4.3
M103A502A000	5.0	10	1.69/42.9	0.97/24.6	0.20/5.1
M253A502A000	5.0	25	2.19/55.6	1.32/33.5	0.22/5.6
M503A502A003	5.0	50	2.56/65.0	1.62/41.1	0.26/6.6
M104A502A004	5.0	100	3.06/77.7	2.01/51.1	0.31/7.9

1. Capacitance Tolerance: +/- 10%
2. Dissipation Factor: .005 Max. @ 25°C, 1 KHZ
3. Insulation Resistance:
  - 4000 MΩ\*μF @25°C, need not exceed 100GΩ
  - 25 MΩ\*μF @125°C, need not exceed 1GΩ
4. Dielectric withstanding voltage:
  - 5.0 kV rated
  - 7.5 kV burn-in for 2 hours @ 100°C
  - 10.0 kV proof for 5 seconds
5. Mylar wrapped, epoxy endcapped
6. Black dot indicates outer foil
7. Wire leads are AWG 18 solder coated copper
8. Safety: Capacitors are shipped with leads shorted

We also manufacture military quality standard and custom designed Spark Gaps and Voltage Multipliers. If you have a corona test requirement but lack the necessary test equipment, we offer AC and DC corona testing services including a test report. Call for information concerning these services.

### Reynolds Industries, Incorporated

Electronic Products Division

3070 Skyway Drive, Santa Maria, CA, 93455 (805) 928-5866 FAX (805) 922-3601

e-mail: dchivolts@cs.com Visit our Website at: www.reynoldsindustries.com

**MasterCard® and Visa®** accepted by phone or FAX only. FOB Santa Maria, CA