

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### DESCRIPTION

Low ESR/ESL

Porcelain Capacitors

Excellent characteristics in current, voltage and power with high Q factor

Highest working voltage in class – 7'000V



### APPLICATIONS

- RF Power Amplifiers
- Industrial (Plasma Chamber)
- Medical (MRI Coils)

### CIRCUIT APPLICATIONS

- DC Blocking
- Matching Networks
- Tuning and Coupling

## I. ELECTRICAL SPECIFICATIONS

Parameter	Value
Capacitance	0.5 to 10'000 pF
Tolerances	B, C, D below 10 pF F, G, J, K, M above 10 pF
Working Voltage (WVDC)	see Capacitance Value chart
Temperature Coefficient	100 +/-30ppm/°C, -55°C to + 125°C
Insulation Resistance	10 <sup>5</sup> MΩ min @ 25°C at rated WVDC 10 <sup>4</sup> MΩ min @ 125°C at rated WVDC
Dielectric Withstanding (test voltage applied for 5 seconds)	2.0 x WVDC for WVDC ≤ 500V 1.5 x WVDC for 500V < WVDC ≤ 2'500V 1.3 x WVDC for WVDC > 2'500V
Aging	none
Piezo Effects	none

## II. MECHANICAL SPECIFICATIONS

Parameter	Value	Comment
Case Size	X E	2225 4040

For each case size, the recommended terminations are listed below.

NB:

- all the terminations are backward compatible and lead-free.
- the non-magnetic terminations are all Magnetism-free Rated.

# CP - High Power, High Q, RoHS

## RF Power Capacitors


Termination Type	Code	CPX	CPE
Standard (tin-plated nickel)	S	AVAILABLE	AVAILABLE
Non-magnetic (tin-plated copper)	C	AVAILABLE	AVAILABLE

### III. ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Life Test	2'000 hours, +125°C at 1.5 x WVDC (WVDC≤500V) at 1.3 x WVDC (500V<WVDC<1'250V) at 1.0 x WVDC (1'250V≤WVDC)
Moisture Resistance Test 1	240 hours, 85% relative humidity at +85°C (ESA/SCC n°3009)
Moisture Resistance Test 2	56 days, 93% relative humidity at +40°C 0V, 5V, 500V max.

### IV. OUTLINE DIMENSIONS


Parameter	X (2225)	E (4040)
Length (L)	$6.20 \pm 0.50$ mm	$10.50 \pm 0.50$ mm
Width (W)	$6.60 \pm 0.50$ mm	$9.50 \pm 0.50$ mm
Thickness (T)	3.80 mm (max.)	4.50 mm (max.)
End-Band (e)	$0.80 \pm 0.60$ mm	$0.80 \pm 0.60$ mm

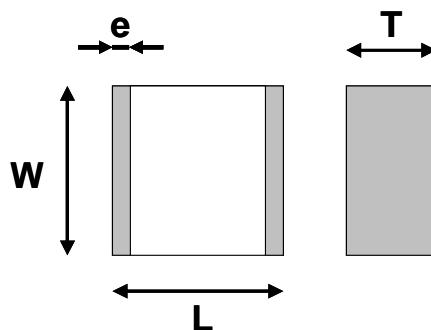

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### V. HOW TO ORDER

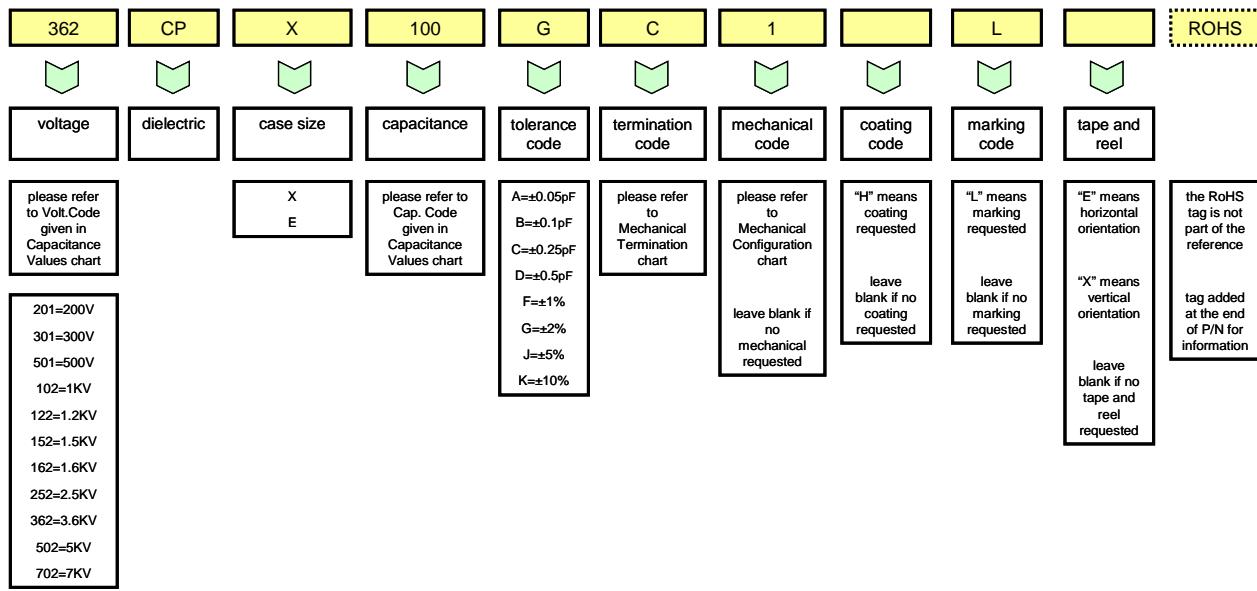

NB: for capacitance values lower than 10pF, tolerances A, B, C and D apply. For capacitance values equal to or higher than 10pF, tolerances F, G, J and K apply.

### VI. TAPE AND REEL

The following chart gives the number of components per reel.

	CPX	CPE
Parts per Reel	500	700

NB: the vertical orientation of product (letter code X) is only available on CPE. In this case, the quantity per reel is 350 pieces.

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### VII. CAPACITANCE VALUES

Value (pF)	Cap. Code	X (2225)		E (4040)		Value (pF)	Cap. Code	X (2225)		E (4040)	
		Standard	Extended	Standard	Extended			Standard	Extended	Standard	Extended
1.0	1R0					56	560				
1.1	1R1					62	620				
1.2	1R2					68	680				
1.3	1R3					75	750				
1.4	1R4					82	820				
1.5	1R5					91	910				
1.6	1R6					100	101				
1.7	17R					110	111				
1.8	1R8					120	121				
1.9	1R9					130	131				
2.0	2R0					150	151				
2.1	2R1					160	161				
2.2	2R2					180	181				
2.4	2R4					200	201				
2.7	2R7					220	221				
3.0	3R0					240	241				
3.3	3R3					270	271				
3.6	3R6					300	301				
3.9	3R9					330	331				
4.3	4R3					360	361				
4.7	4R7					390	391				
5.1	5R1					430	431				
5.6	5R6					470	471				
6.2	6R2					510	511				
6.8	6R8					560	561				
7.5	7R5					620	621				
8.2	8R2					680	681				
9.1	9R1					750	751				
10	100					820	821				
11	110					910	911				
12	120					1 000	102				
13	130					1 100	112				
15	150					1 200	122				
16	160					1 500	152				
18	180					1 800	182				
20	200					2 200	222				
22	220					2 700	272				
24	240					3 000	302				
27	270					3 300	332				
30	300					3 900	392				
33	330					4 700	472				
36	360					5 100	512				
39	390					5 600	562				
43	430					6 800	682				
47	470					8 200	822				
51	510					10 000	103				

NB: special values, tolerances, higher WVDC and matching available, please consult factory.

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### VIII. MECHANICAL CONFIGURATIONS

#### VIII.1. Lead/Ribbon and Wire Types

<i>Configuration Type</i>	<i>Code</i>	<i>Description</i>
	1	Micro-strip Ribbon
	1S	Short-strip Ribbon
	2	Axial Ribbon
	6	Radial Wire
	7	Axial Wire

NB: when coding ribbons or wires for the description of the part, the termination has to be mentioned for MR<sub>certified</sub> types to ensure that only non-magnetic materials are used.

Examples :    362 CPE 470 J1L  
                   362 CPE 470 JC1L

any termination material could be used  
                   only non-magnetic termination materials could be used

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### VIII.2. Lead/Ribbon and Wire Matrix

<b>Termination Type</b>	<b>Code</b>	<b>CPX</b>	<b>CPE</b>
Micro-strip Ribbon	1	AVAILABLE	AVAILABLE
Short Micro-strip Ribbon	1S		AVAILABLE
Axial Ribbon	2		AVAILABLE
Radial Wire	6	AVAILABLE <sup>(1)</sup>	AVAILABLE <sup>(1)</sup>
Axial Wire	7	AVAILABLE <sup>(1)</sup>	AVAILABLE <sup>(1)</sup>

(1) These terminations are non RoHS.

### VIII.3. Lead/Ribbon and Wire Dimensions

Within each cell, first the length and then the width/diameter of any single ribbon or wire are given.

<b>Termination Type</b>	<b>Code</b>	<b>CPX</b>	<b>CPE</b>
Micro-strip Ribbon	1	12.00 5.40	16.00 8.90
Short Micro-strip Ribbon	1S		8.50 8.90
Axial Ribbon	2		16.00 8.90
Radial Wire	6	30.00 0.60	30.00 0.90
Axial Wire	7	30.00 0.60	30.00 0.90


NB: dimensions are in mm.

# CP - High Power, High Q, RoHS


## RF Power Capacitors

### IX. PERFORMANCE DATA

#### IX.1. ESR

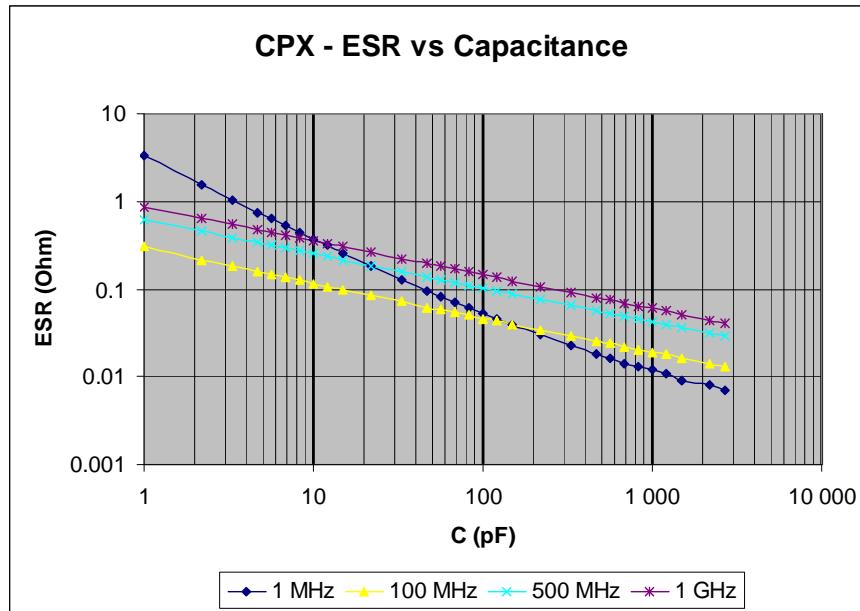



#### IX.2. Series Resonance Frequency

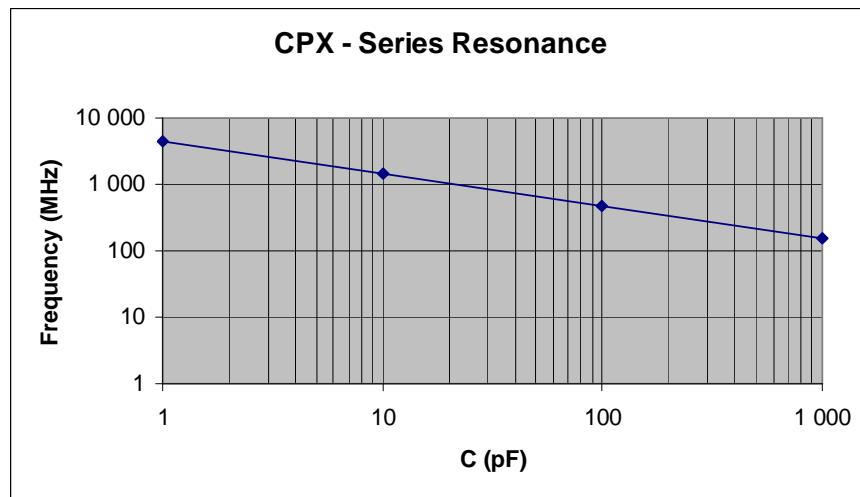

# CP - High Power, High Q, RoHS

## RF Power Capacitors

### IX.3. Current Rating

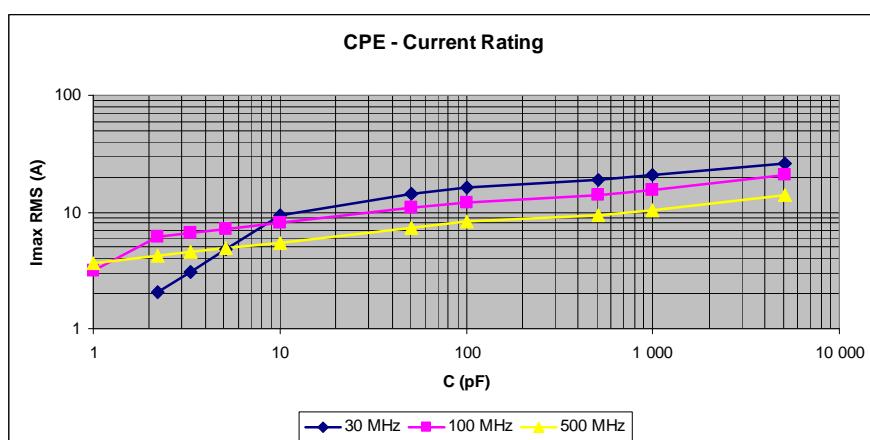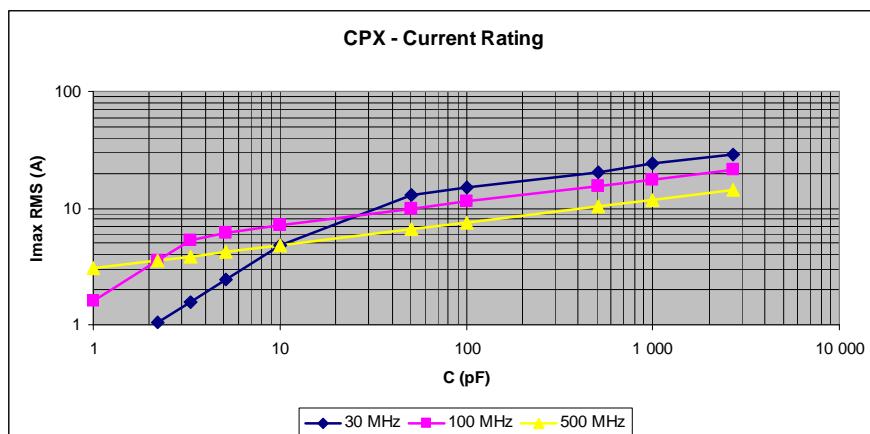

### IX.4. Q Factor

