

5

4

3

2

1

SPECIFICATIONS

ELECTRICAL
FREQUENCY _____ DC TO 18 GHzMECHANICAL
MATERIAL _____ BERYLLIUM COPPER

FINISH _____ NICKEL FREE GOLD PLATE

TEMPERATURE _____ 4 KELVIN TO +125°C

MARKING

PART LOOKS LIKE PRODUCT IMAGE.

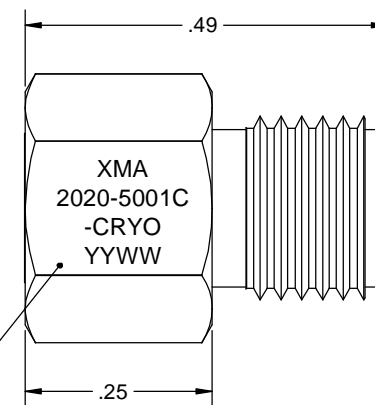

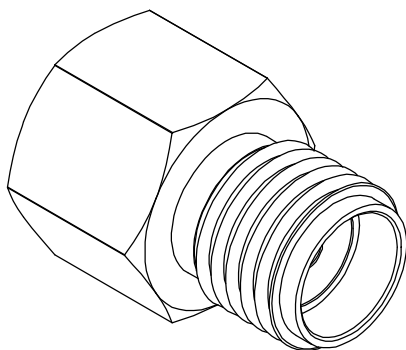
PART MARKING ORIENTATION AND FORMAT AS SHOWN.

MARKING TO BE AS LARGE AS POSSIBLE, CLEAR, AND READABLE.

YYWW = DATE CODE.

PACKING

ITEMS SHALL BE INDIVIDUALLY BAGGED AND PLACED INTO A LARGER BAG.

MARKING
SURFACE

QTY.	PART NUMBER	DESCRIPTION	ITEM NO.
X	2020-5001C-CRYO	SHORT, SMA-f	
1	TA-2020-5001CU-CRYO	ASSEMBLY, SHORT, SMA-f, UNMARKED	1

DRAWING PRACTICES PER ANSI-Y-14.5
MIL-STD-100 & 1000DIMENSIONS ARE IN INCHES AND
APPLY BEFORE / AFTER PROCESSINGSURFACE
ROUGHNESS

63

FINISH:

SEE NOTES

MATERIAL:

SEE NOTES

NOTE:
THIS DRAWING INCORPORATES
THIRD ANGLE PROJECTION.

INTERPRET IAW ANSI Y14.5-1982

UNLESS OTHERWISE SPECIFIED
TOLERANCES IN:

DECIMALS	INCH	[MM]
.X"	.05"	[1.27]
.XX"	.03"	[.76]
.XXX"	.010"	[.25]

ANGLES $\pm 0^{\circ}30'$
REMOVE ALL BURRS/SHARP W/
BREAK / R OF .003" TO .0005"
UNLESS OTHERWISE NOTED
DIAS CONCENTRIC $< .003$ T.I.R.

DO NOT SCALE PRINT

DRAWN	DATE
MCCORMICK	5/11/23
CHECKED	DATE
MCCORMICK	5/11/23
ENG. APPR.	DATE
DEL	5/11/23

THESE DRAWINGS AND
SPECIFICATIONS ARE THE PROPERTY
OF XMA CORP. OR OMNI SPECTRA
AND SHALL NOT BE REPRODUCED,
COPIED NOR USED - IN WHOLE OR IN
PART - AS A BASIS FOR THE
MANUFACTURE OR SALE OF OTHER
ITEMS WITHOUT THE EXPRESS
WRITTEN PERMISSION OF XMA CORP.Phone: 603-222-2256 Fax: 603-222-2259
7 Perimeter Road, Manchester, NH 03103

TITLE

SHORT, SMA-f, CRYO

SIZE	CAGE CODE	DRAWING NUMBER	REV
B	3HT76	2020-5001C-CRYO	X2
SCALE	PLATED AREA SQ. IN	SHEET 1 OF 1	