


SPECIFICATION SHEET

JFW MODEL 50T-143

TERMINATION

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Description	Termination with Bead Chain
Frequency Range	DC-8000 MHz
Impedance	50 Ohms nominal
VSWR	1.1:1 maximum DC-1000 MHz 1.2:1 maximum 1000-4000 MHz 1.35:1 maximum 4000-8000 MHz
RF Input Power	2 Watts average
RF Connector	TNC male with beadchain
Physical Size	See outline drawing 092-1648

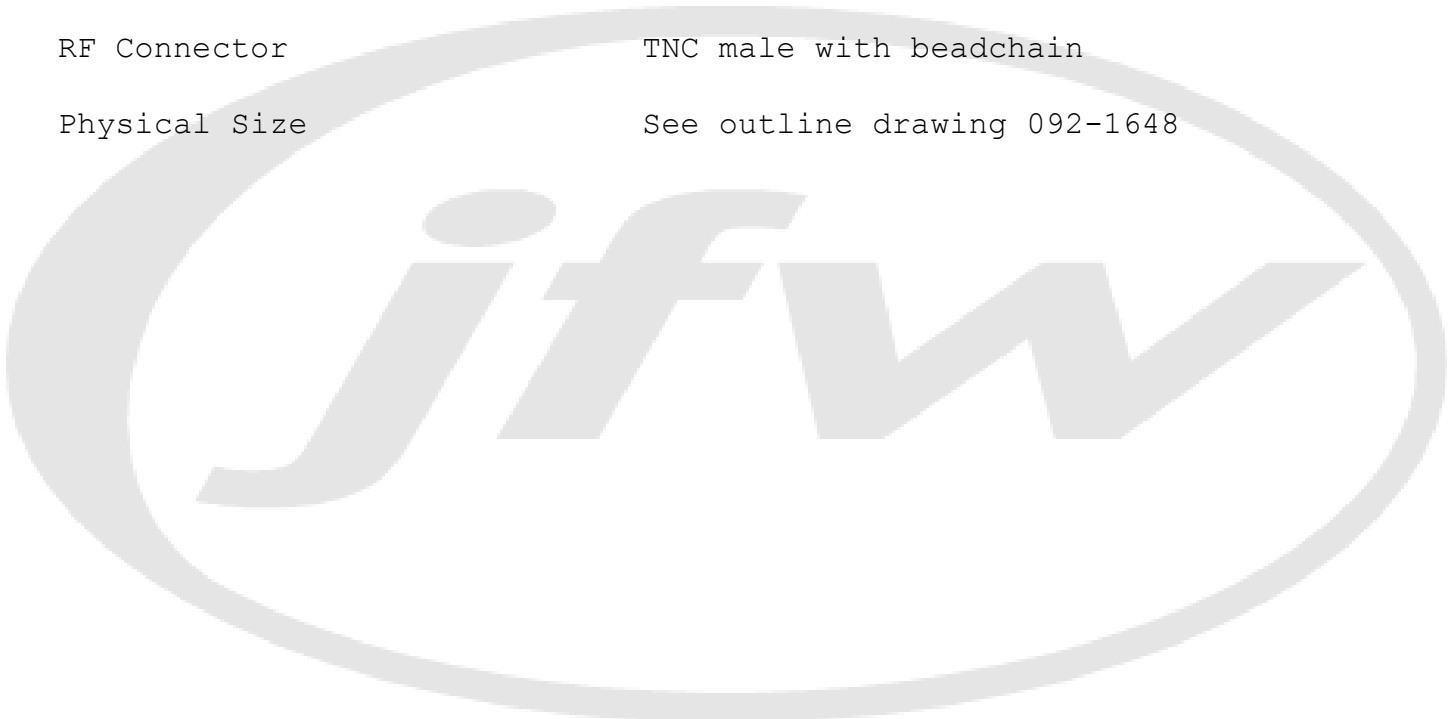

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
9999	02/14/2003	A	SL 04/30/2003				
23840	03/10/2014	B	TRS 03/10/2014				