


SPECIFICATION SHEET

JFW MODEL 50DB-002

DC BLOCK

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	50 KHz-1800 MHz
Impedance	50 Ohms nominal
VSWR	1.3:1 maximum
Insertion Loss	0.5 dB maximum
DC Breakdown Voltage	100 Volts
RF Input Power	2 Watts average
RF Connector	BNC, TNC or N
Physical Size	See drawing 092-233 (BNC M/F) See drawing 092-180 (TNC M/F) See drawing 092-1948 (N M/F) See drawing 092-4941 (BNC F/TNC M)

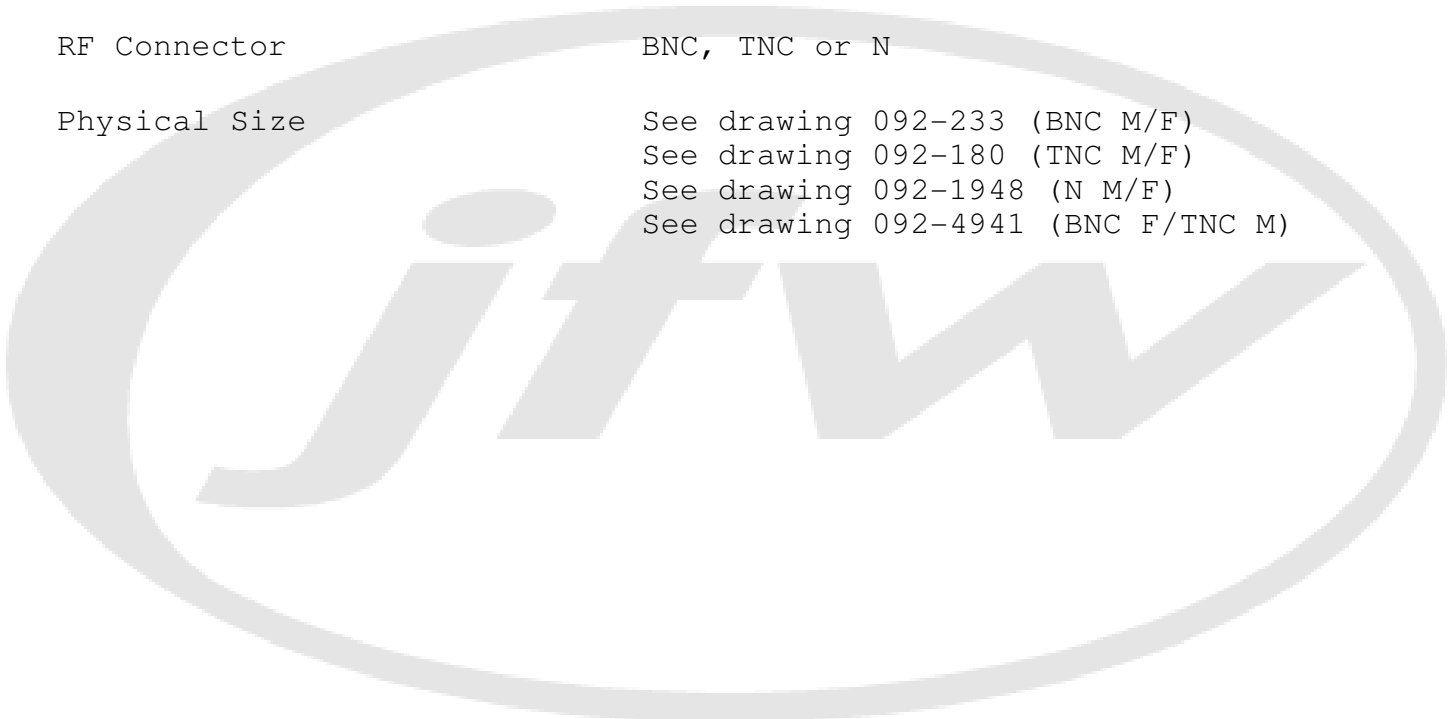

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
99	02/10/1993	A		3074	08/07/2002	D	
763	07/18/1997	B		9999	10/14/2002	E	SL 10/14/2002
2589	02/14/2001	C		11916	09/28/2005	F	BAC 09/28/2005