


SPECIFICATION SHEET

JFW MODEL 50PD-379

2 WAY RESISTIVE POWER DIVIDER

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	DC-4000 MHz
Impedance	50 Ohms nominal
VSWR	1.35:1 maximum
Insertion Loss	6 dB ± 0.6 dB
Amplitude Tracking	± 0.5 dB
RF Input Power	2 Watts average @ 25°C 100 Watts peak (1 microsecond)
RF Connector	N, SMA, BNC, or TNC
Physical Size	See outline drawing 092-2328 (N) 092-5294 (NF/NM/SF) 092-5860 (N M/F/F)

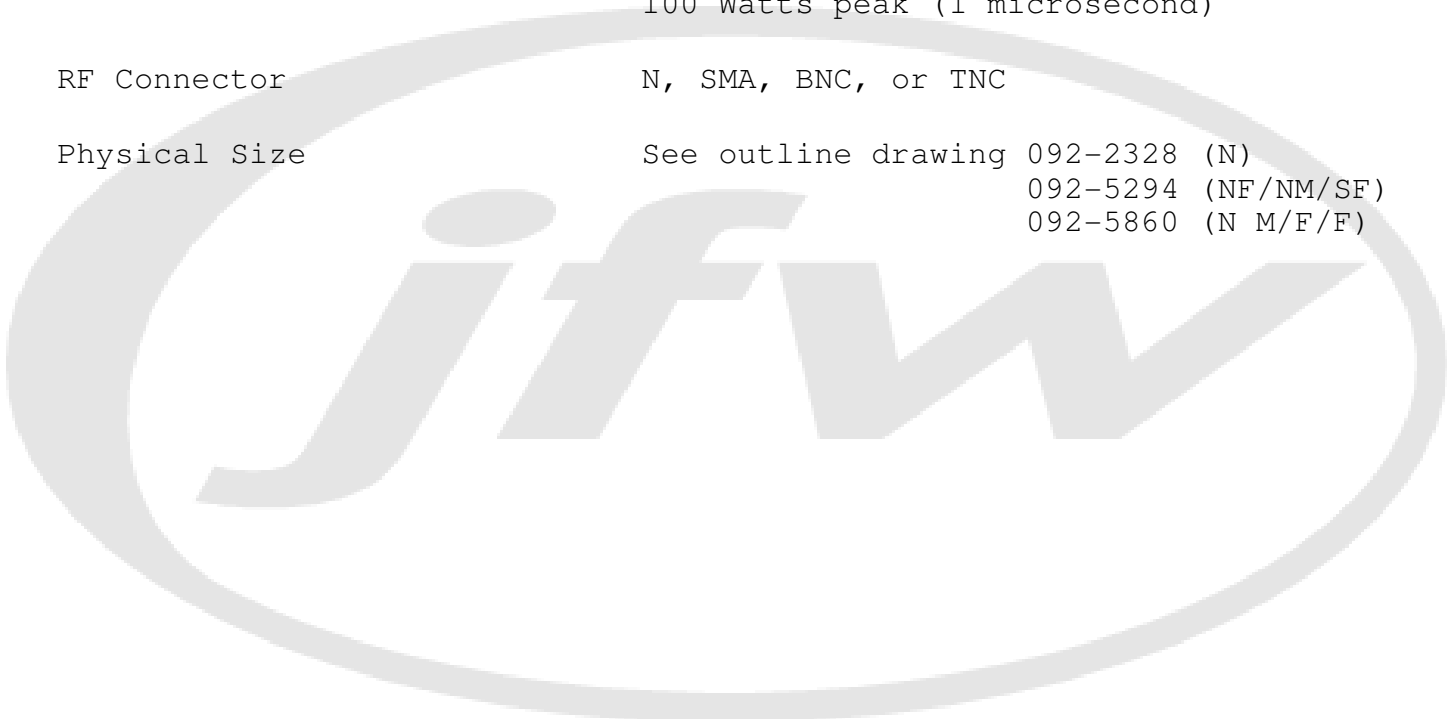

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	02/06/2001			16317	09/17/2008	C	TRS 09/17/2008
9999	12/19/2002	A	SL 01/07/2003				
13792	01/23/2007	B	TRS 01/23/2007				