



B-138S 3PST N.O., 60 Amps, 115/200 VAC, 300 to 600 Hz

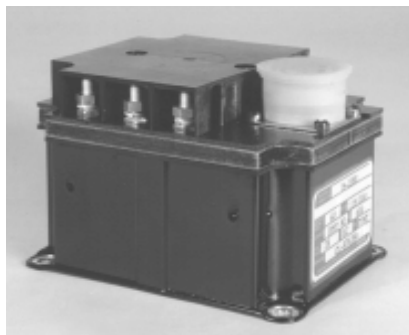


Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.

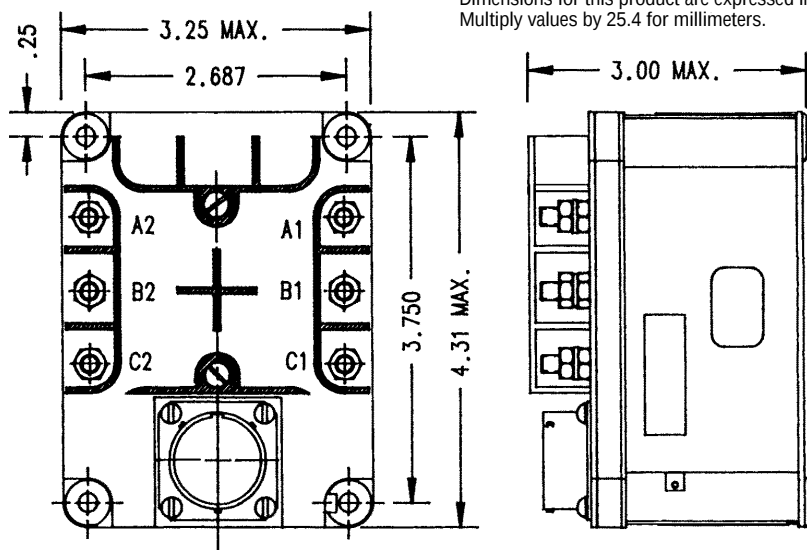

Features:

- 3PST N.O. Main Contacts
- Transient Suppression
- 115/200 VAC, 300 to 600 Hz
- 60 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

CONTACTOR CONFIGURATION

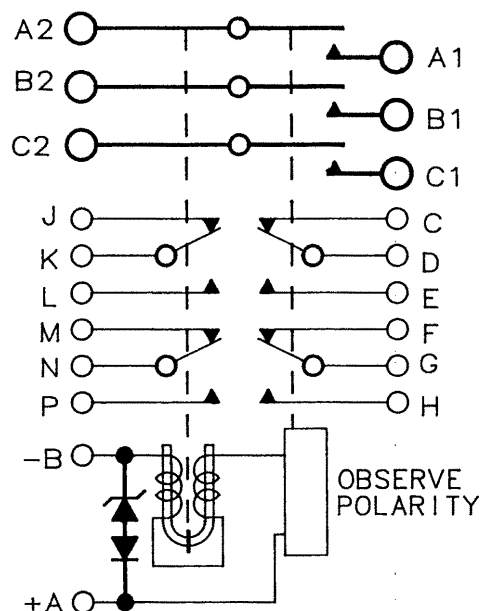

Notes:

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	3PST N.O.
Voltage (Nominal)	115/200 VAC, 300 to 600 Hz
Current (Resistive)	60 Amps
Auxiliary Contacts:	
Configuration	4-SPDT
Voltage (Nominal)	28 VDC or 200 VAC, 400 Hz
Current	
Resistive	5 Amps
Inductive	2 Amps
Lamp	1 Amp
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	1 - 9 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	3 Amps Maximum
Hold	315 mA Maximum
Operating Temperature	-55°C to +85°C
Life:	
Electrical	50,000 Cycles
Weight Maximum	1 Lb. 12 Oz.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.