

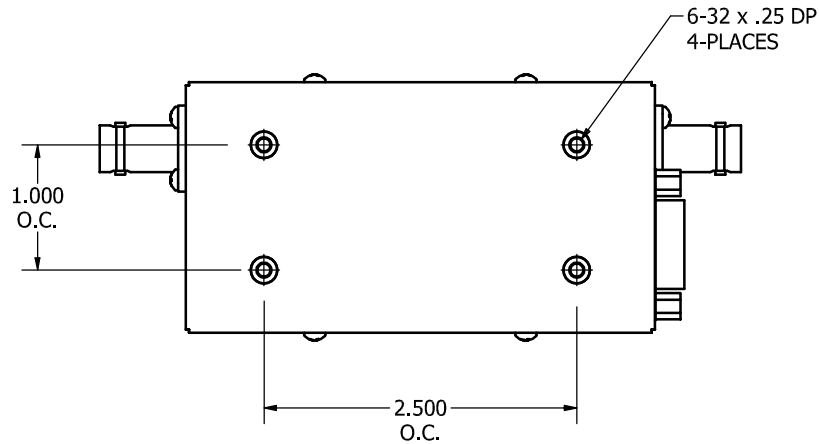


DETAIL A
DE-9P

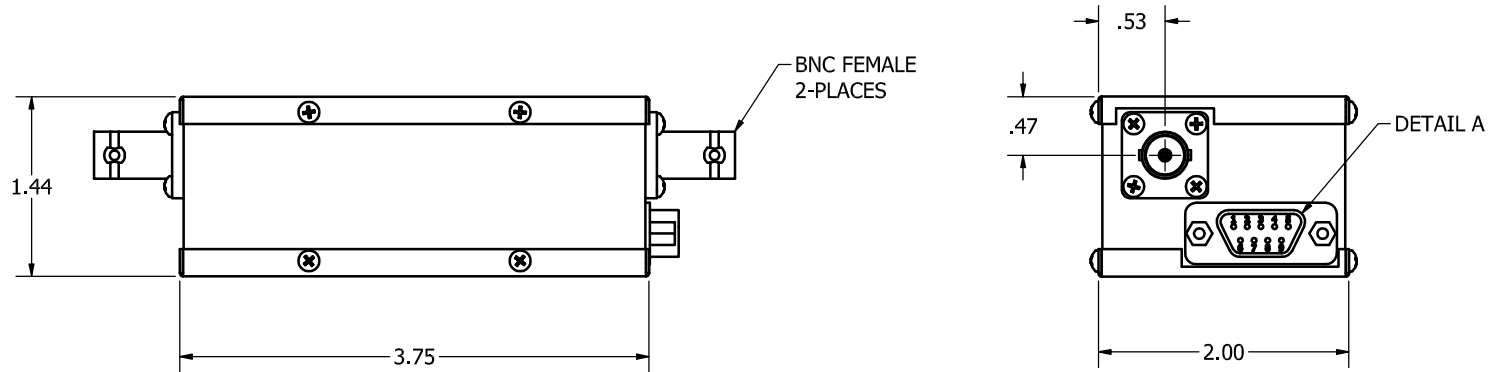

PIN	50P-157	50P-320/1472	75P-067	75P-120/124/161 50P-376/602/646
1	.25 dB TTL CONTROL	.5 dB TTL CONTROL	.5 dB TTL CONTROL	1 dB TTL CONTROL
2	.5 dB TTL CONTROL	1 dB TTL CONTROL	1 dB TTL CONTROL	2 dB TTL CONTROL
3	1 dB TTL CONTROL	2 dB TTL CONTROL	2 dB TTL CONTROL	4 dB TTL CONTROL
4	2 dB TTL CONTROL	4 dB TTL CONTROL	4 dB TTL CONTROL	8 dB TTL CONTROL
5	4 dB TTL CONTROL	8 dB TTL CONTROL	8 dB TTL CONTROL	16 dB TTL CONTROL
6	8 dB TTL CONTROL	16 dB TTL CONTROL	16 dB TTL CONTROL	32 dB TTL CONTROL
7	NO CONNECTION	NO CONNECTION	NO CONNECTION	NO CONNECTION
8	GROUND	GROUND	GROUND	GROUND
9	+Vdc	+Vdc	+Vdc	+Vdc

REV	ECN	DATE	BY	APPR			
-	ISSUED	12-14-83	---	---			
A	---	1-9-84	---	FDW			
B	1154	7-20-85	JD	FDW			
C	1677	4909	6-17-87	FDW			
D	4909	2-21-96	CDJ	FDW			
E	5192	2-3-97	CDJ	FDW			
F	6753	6-14-01	TEZ	TEZ			
G	12356	1-20-06	TEZ	TEZ			
H	13554	10-31-06	BZ	TEZ			
J	24444	9-18-15	JZ	TEZ			

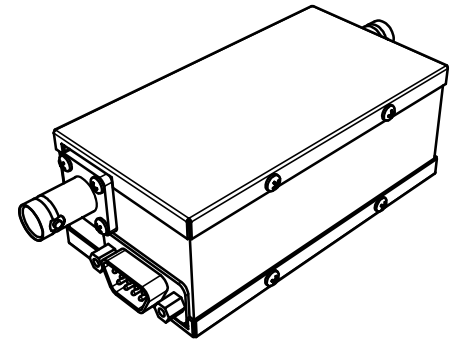

JFW INDUSTRIES, INC.

www.jfwindustries.com

PH: 317-887-1340

MATERIAL BRASS PROPRIETARY INFORMATION

FINISH NICKEL ALL SURFACES ARE TO BE FREE OF BURRS, PITS & SCRATCHES

MODEL SCALE FULL TOLERANCES .XX±.010 .XXX±.005 XX*±.5°

DESCRIPTION SOLID STATE PROG. ATTEN. DWG # 092-319